OAK - SMOKED OAK - ASH - CHERRY - BLACK WALNUT - ELM



Woodtype	ASH
Description	3 layers of the same hardwood. The Ash without heartwood has a light yellow to slightly brownish colour. The sorting Auslese is essentially knot-free*, with a simple structure.
Brinell hardness Gross density	4,5 kp 0,69 g∣cm³

# 1-Strip Country House Flooring ASH Auslese "St.Pölten"

### Surfaces

- Oil | wax oxidative dried
- Varnished 7-times
- Untreated sanded
- 🗹 Brushed
- 🗹 Bevel
- 🗹 Special colour



Sorting guidelines	Auslese
Healthy knots	till ø 5 mm allowed
Black knots	till ø 5 mm allowed
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	not allowed
Curled spots   differences in structure	scattered allowed
Natural differences in colour	slightly allowed
Natural fiber orientation	scattered allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	not allowed
Red or brown spots	not allowed
Stains from storage and light blueness	not allowed
Knocked spots	not allowed
Mirror	not allowed

### Technical data Thickness: 15 mm Useful layer: approx. 5 mm Width: 150 mm Length: Lengthsystem 6 layers 1900 mm (8 layers | pkg.) 2 layers 950 mm\* Connection: Tongue and groove One layer 950 mm consists of 2 boards\* m<sup>2</sup>|pkg. 2,28 m<sup>2</sup>|pal. 111,72 kg|pkg. 23 kg|pal. 1127 Floating laying

- ✓ Glued laying
- Suitable for underfloor heating when gluing the entire area with solvent-free adhesives



OAK - SMOKED OAK - ASH - CHERRY - BLACK WALNUT - ELM



Woodtype	ASH
Description	3 layers of the same hardwood. The Ash without heartwood has a light yellow to slightly brownish colour. The sorting Wohngefühl is knotty, with a medium structure.
Brinell hardness Gross density	4,5 kp 0,69 g   cm³

# 1-Strip Country House Flooring ASH Wohngefühl "Eisenstadt"

## Surfaces


- Oil | Wax oxidative dried
- Varnished 7-times
- Intreated sanded
- 🗹 Brushed
- 🗹 Bevel
- Special colour



Sorting guidelines	Wohngefühl
Healthy knots	allowed (partly filled)
Black knots	to approx. 35 mm allowed (partly filled)
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	scattered allowed (partly filled)
Curled spots   differences in structure	scattered allowed
Natural differences in colour	allowed
Natural fiber orientation	to max. 1   3 allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	not allowed
Red or brown spots	scattered allowed
Stains from storage and light blueness	not allowed
Knocked spots	not allowed
Mirror	not allowed

### Technical data Thickness: 15 mm Useful layer: approx. 5 mm Width: 150 mm Length: Lengthsystem 6 layers 1900 mm (8 layers | pkg.) 2 layers 950 mm\* Connection: Tongue and groove One layer 950 mm consists of 2 boards\* m<sup>2</sup>|pkg. 2,28 m<sup>2</sup> | pal. 111,72 kg|pkg. 23 kg|pal. 1127 Floating laying $\checkmark$

- ✓ Glued laying
- Suitable for underfloor heating when gluing the entire area with solvent-free adhesives

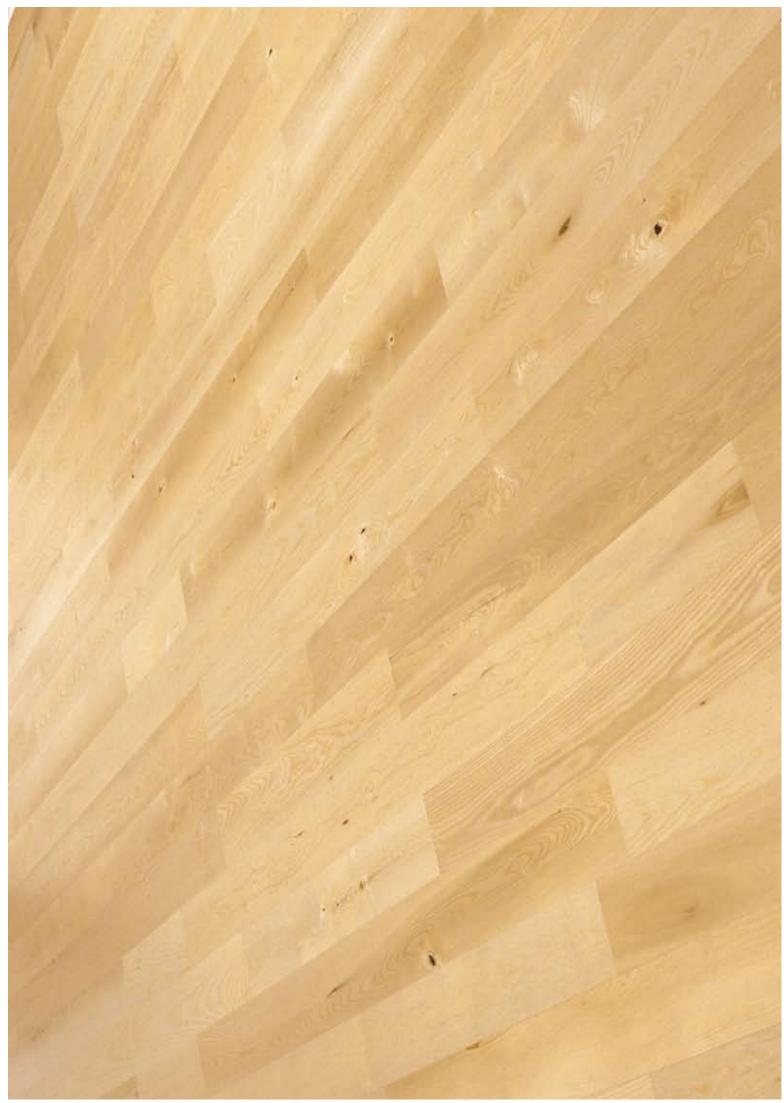

BERGLAND PARKETT

Woodtype	ASH
Description	3 layers of the same hardwood. The Ash without heartwood has a light yellow to slightly brownish colour. The sorting Wohngefühl is knotty, with a medium structure.
Brinell hardness Gross density	4,5 kp 0,69 g   cm³

# 1-Strip Country House Flooring ASH Wohngefühl "Eisenstadt" B190

OAK - SMOKED OAK - ASH - CHERRY - BLACK WALNUT - ELM

# Surfaces

- Oil | Wax oxidative dried
- Varnished 7-times
- Untreated sanded
- 🗹 Brushed
- 🗹 Bevel
- Special colour




Sorting guidelines	Wohngefühl
Healthy knots	allowed (partly filled)
Black knots	to approx. 35 mm allowed (partly filled)
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	scattered allowed (partly filled)
Curled spots   differences in structure	scattered allowed
Natural differences in colour	allowed
Natural fiber orientation	to max. 1   3 allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	not allowed
Red or brown spots	scattered allowed
Stains from storage and light blueness	not allowed
Knocked spots	not allowed
Mirror	not allowed

# Technical data Thickness: 15 mm

		Usetul lave	er: approx. 5 mm
Width:	190 mm		
Length:	Lengthsysten	n 5 layers	1900 mm
	(6 layers   pkg	g.) 1 layer	950 mm*
Connection:	Tongue and g	groove	
	One layer 950 mm	consists of 2 boo	ards*
m² pkg. 2	2,17	m² pal.	97,65
kg pkg. 2	22	kg pal.	990

- Floating laying
- Glued laying
- Suitable for underfloor heating when gluing the entire area with solvent-free adhesives

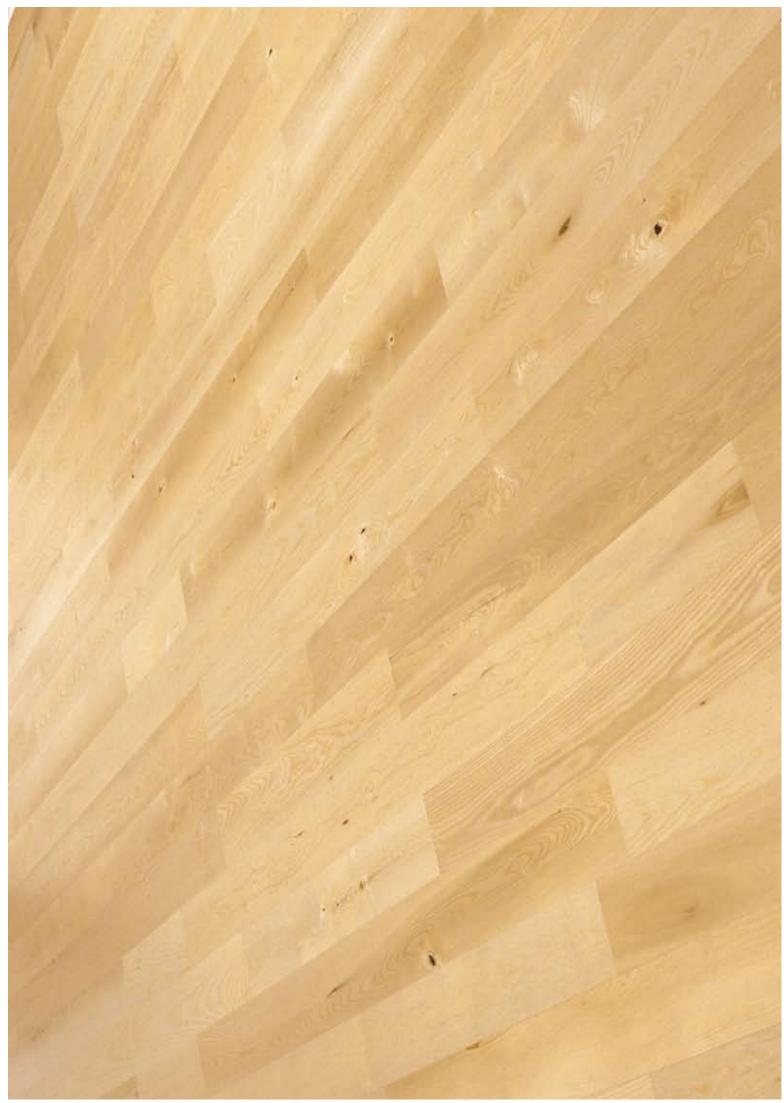

OAK - SMOKED OAK - ASH - CHERRY - BLACK WALNUT - ELM



Woodtype	ASH
Description	3 layers of the same hardwood. The Ash with heartwood has a light yellow to slightly brownish to prominent dark brown colour. The sorting Design is slightly to very knotty, with a lively structure.
Brinell hardness Gross density	4,5 kp 0,69 g   cm³

# 1-Strip Country House Flooring ASH Design "Melk"

### Surfaces

- Oil | Wax oxidative dried
- Varnished 7-times
- Untreated sanded
- 🗹 Brushed
- 🗹 Bevel
- Special colour

### Also available as

✓ System board (Fixlength 1100 mm)

### 🗹 Kreativ 10,7 mm

Sorting guidelines	Design
Healthy knots	allowed (partly filled)
Black knots	allowed (partly filled)
Healthy red heart	allowed
Healthy heartwood	allowed
Cracks	allowed (partly filled)
Curled spots   differences in structure	allowed
Natural differences in colour	allowed
Natural fiber orientation	allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	not allowed
Red or brown spots	allowed
Stains from storage and light blueness	allowed
Knocked spots	not allowed
Mirror	not allowed




.

ymbol	picture	- may	vary in	colour	and	structure

Technical data			
Thickness: 1	5 mm	Useful laye	er: approx. 5 mm
Width: 15	50 mm	,	
Length: Le	engthsyster	n 6 layers	1900 mm
8)	(8 layers   pkg.) 2 layers 950 mm*		
Connection: Tongue and groove			
0	ne layer 950 mm	consists of 2 boo	ards*
m² pkg. 2,2	28	m² pal.	111,72
kg pkg. 23 kg pal. 1127			
Floating laying			

- Glued laying
- Suitable for underfloor heating when gluing the entire area with solvent-free adhesives

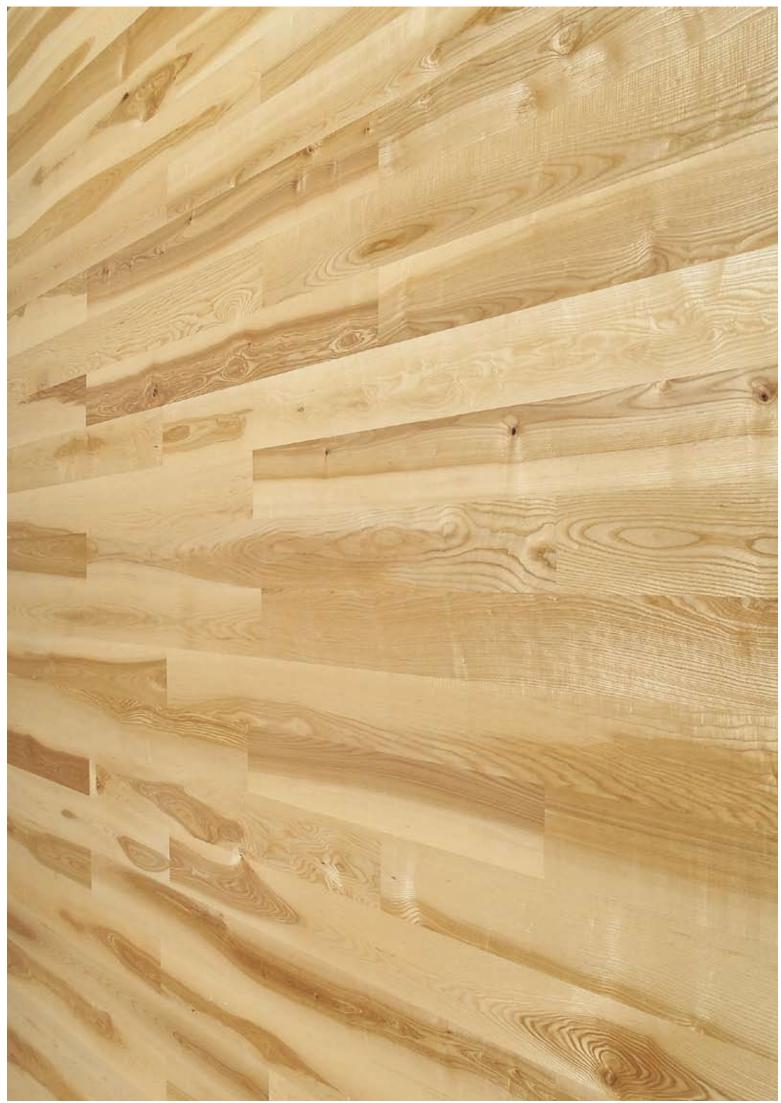

OAK - SMOKED OAK - ASH - CHERRY - BLACK WALNUT - ELM



Woodtype	ASH
Description	3 layers of the same hardwood. The Ash with heartwood has a light yellow to slightly brownish to prominent dark brown colour. The sorting Design is slightly to very knotty, with a lively structure.
Brinell hardness Gross density	4,5 kp 0,69 g∣cm³

# 1-Strip Country House Flooring ASH Design "Melk" B190

### Surfaces


- Oil | Wax oxidative dried
- Varnished 7-times
- Untreated sanded
- 🗹 Brushed
- 🗹 Bevel
- Special colour



Sorting guidelines	Design
Healthy knots	allowed (partly filled)
Black knots	allowed (partly filled)
Healthy red heart	allowed
Healthy heartwood	allowed
Cracks	allowed (partly filled)
Curled spots   differences in structure	allowed
Natural differences in colour	allowed
Natural fiber orientation	allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	not allowed
Red or brown spots	allowed
Stains from storage and light blueness	allowed
Knocked spots	not allowed
Mirror	not allowed

### Technical data Thickness: 15 mm Useful layer: approx. 5 mm Width: 190 mm Length: Lengthsystem 5 layers 1900 mm (6 layers | pkg.) 1 layer 950 mm\* Connection: Tongue and groove One layer 950 mm consists of 2 boards\* m<sup>2</sup>|pkg. 2,17 m<sup>2</sup> | pal. 97,65 kg|pal. 990 kg|pkg. 22 Floating laying

- ✓ Glued laying
- Suitable for underfloor heating when gluing the entire area with solvent-free adhesives

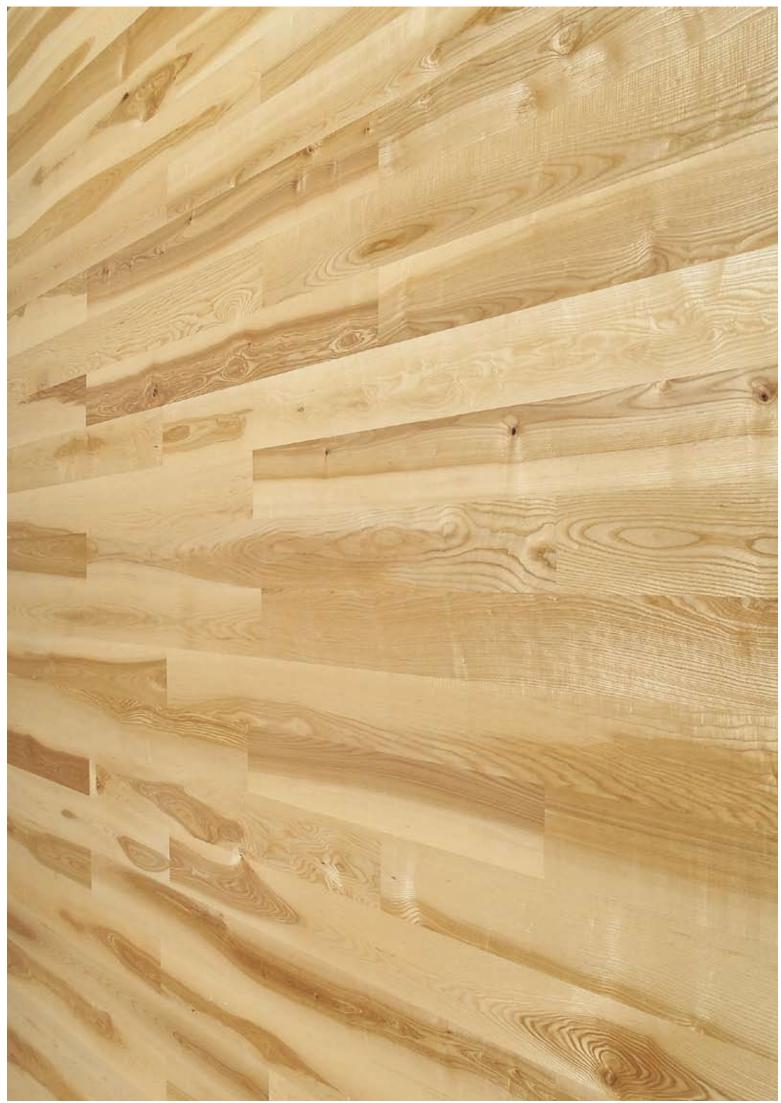


TYPES OF WOOD

OAK - SMOKED OAK - ASH - CHERRY - BLACK WALNUT - ELM



Woodtype	ASH
Description	3 layers of the same hardwood. The Ash without heartwood has a light yel- low to slightly brownish colour. The special feature are the natural colour diffe- rences. The sorting Ambiente is slightly to very knotty, with a medium structure.
Brinell hardness Gross density	4,5 kp 0,69 g   cm³

# 1-Strip Country House Flooring ASH Ambiente City Star "Paris"

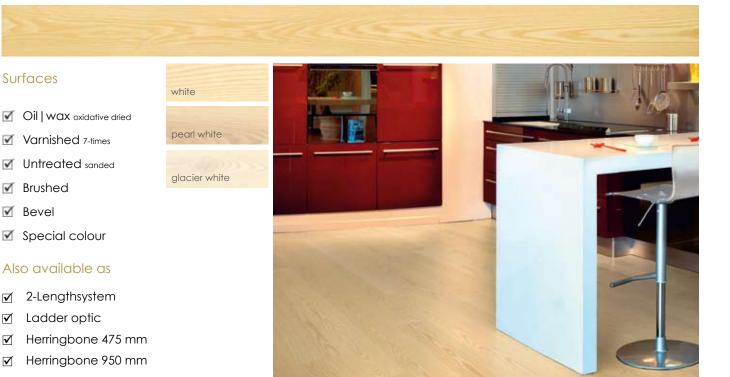

Sorting guidelines	Auslese
Healthy knots	till Ø 10 mm allowed (partly filled)
Black knots	till Ø 10 mm allowed (partly filled)
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	not allowed
Curled spots   differences in structure	allowed
Natural differences in colour	allowed
Natural fiber orientation	allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	not allowed
Red or brown spots	not allowed
Stains from storage and light blueness	not allowed
Knocked spots	not allowed
Mirror	not allowed

 $\checkmark$ 

 $\checkmark$  $\checkmark$ 

Symbol picture - can vary in colour and

Technical data			
Thickness: Width:	15 mm 120 mm	ι	Jseful layer: approx. 5 mm
Length:	Lengthsys	stem*	5 layers 1900 mm
	(8 Layers	Pkg.)	3 layers 950 mm**
	Lengthsys	stem	6 layers 950 mm**
	(8 Layers	Pkg.)	2 layers 475 mm***
Connection:	Nut und Feder One layer 950 mm consists of 2 boards** One layer 475 mm consists of 2 boards***		
m²   Pkg. 1,83*   0,91		m²   Pal. 89,67*   57,33	
kg Pkg.18* 9		kg	Pal. 882* 567
<ul> <li>Floating laying</li> <li>Glued laying</li> <li>Suitable for underfloor heating when gluing the entire area with solvent-free adhesives</li> </ul>			



 TYPES OF WOOD
 MAPLE - BEECH natural | steamed - BIRCH - PEAR - ALDER

 OAK - SMOKED OAK - ASH - CHERRY - BLACK WALNUT - ELM



Woodtype	ASH steamed
Description	3 layers of the same hardwood. The Ash without heartwood receives a brown colour due to the steaming with vitalized Grander water. The special feature is the white or black pore. The sorting Emotion is slightly knotty, with a lively structure.
Brinell hardness Gross density	4,5 kp 0,69 g   cm³


# 1-Strip Country House Flooring steamed Emotion "Velden"



Sorting guidelines	Emotion
Healthy knots	allowed (partly filled)
Black knots	allowed (partly filled)
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	not allowed
Curled spots   differences in structure	allowed
Natural differences in colour	allowed
Natural fiber orientation	allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	not allowed
Red or brown spots	allowed
Stains from storage and light blueness	allowed
Knocked spots	not allowed
Mirror	not allowed

Technical data		
Thickness: 15 mm	Useful layer: approx. 5 mm	
Width: 150 mm	·····	
Length: Lengthsy	ystem 6 layers 1900 mm	
(8 layers	pkg.) 2 layers 950 mm*	
Connection: Tongue and groove		
One layer 9	50 mm consists of 2 boards*	
m² pkg. 2,28	m² pal. 111,72	
kg pkg. 23	kg pal. 1127	
Floating laying		

- Glued laying
- Suitable for underfloor heating when gluing the entire area with solvent-free adhesives

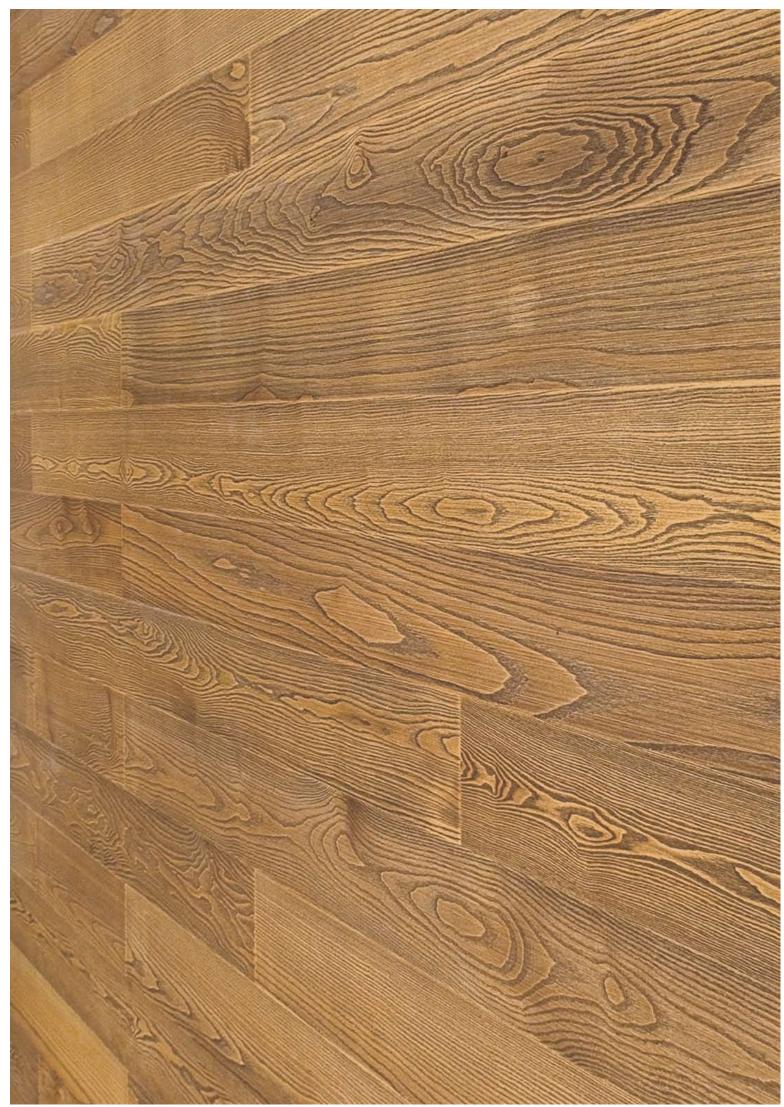


Symbol picture - may vary in colour and structure

OAK - SMOKED OAK - ASH - CHERRY - BLACK WALNUT - ELM



Woodtype	ASH
Description	3 layers of the same hardwood. The Ash without heartwood has a light yellow to slightly brownish colour. The special feature is the white or black pore. The sorting Emotion is slightly knotty, with a lively structure.
Brinell hardness Gross density	4,5 kp 0,69 g   cm³

# 1-Strip Country House Flooring ASH Emotion "Pörtschach"

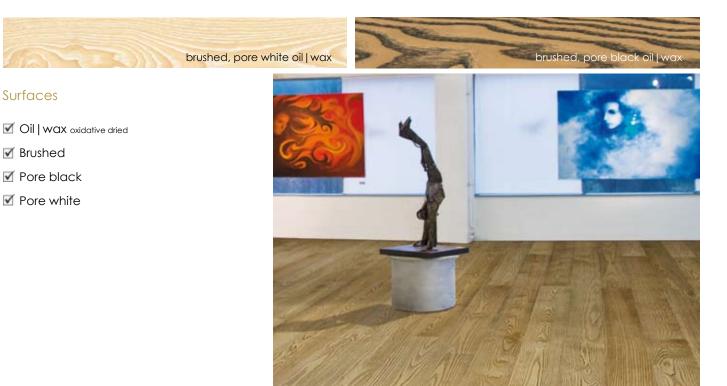

Sorting guidelines	Emotion
Healthy knots	allowed (partly filled)
Black knots	allowed (partly filled)
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	not allowed
Curled spots   differences in structure	allowed
Natural differences in colour	allowed
Natural fiber orientation	allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	not allowed
Red or brown spots	allowed
Stains from storage and light blueness	allowed
Knocked spots	not allowed
Mirror	not allowed

Technical data	
Thickness: 15 mm	Useful layer: approx. 5 mm
Width: 150 mm	
Length: Lengthsys	stem 6 layers 1900 mm
(8 layers	pkg.) 2 layers 950 mm*
Connection: Tongue a	nd groove
One layer 950	) mm consists of 2 boards*
m² pkg. 2,28	m² pal. 111,72
kg pkg. 23	kg pal. 1127
Floating laying	

- Glued laying
- Suitable for underfloor heating when gluing the entire area with solvent-free adhesives



 TYPES OF WOOD
 MAPLE - BEECH natural | steamed - BIRCH - PEAR - ALDER

 OAK - SMOKED OAK - ASH - CHERRY - BLACK WALNUT - ELM



Woodtype	ASH steamed
Description	3 layers of the same hardwood. The Ash without heartwood receives an appealing dark brown colour due to the steaming with vitalized Grander water and the special treatment with oil   wax mocca brown. The sorting Emotion is slightly knotty, with a lively structure.
Brinell hardness Gross density	4,5 kp 0,69 g∣cm³

# 1-Strip Country House Flooring ASH steamed Emotion "Nizza"

softly brushed, mocca brown oil | wax

### Surfaces

- Oil | Wax oxidative dried
- Mocca brown colour



Sorting guidelines	Emotion
Healthy knots	allowed (partly filled)
Black knots	allowed (partly filled)
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	not allowed
Curled spots   differences in structure	allowed
Natural differences in colour	allowed
Natural fiber orientation	allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	not allowed
Red or brown spots	allowed
Stains from storage and light blueness	allowed
Knocked spots	not allowed
Mirror	not allowed

Technical data	
Thickness: 15 mm	lister i lan se an
Width: 150 mm	Useful layer: approx. 5 mm
Length: Lengthsy	ystem 6 layers 1900 mm
(8 layers	pkg.) 2 layers 950 mm*
Ũ	and groove
m² pkg. 2,28	m² pal. 111,72
kg pkg. 23	kg pal. 1127
Floating laying	

- ✓ Glued laying
- Suitable for underfloor heating when gluing the entire area with solvent-free adhesives



TYPES OF WOOD MAPLE - BEECH natural | steamed - BIRCH - PEAR - ALDER OAK - SMOKED OAK - ASH - CHERRY - BLACK WALNUT - ELM

LUXURY CLASS

Woodtype	ASH
Description	3 layers of the same hardwood. The Ash with heartwood is varnished in a techno grey colour. Thus, a modern and vivid look is created. The sorting Design is slightly to very knotty, with a lively structure.
Brinell hardness Gross density	4,5 kp 0,69 g   cm³

# 1-Strip Country House Flooring ASH Design "Ingolstadt" techno grey

with heartwood, softly brushed, techno grey varnished

# Surfaces

- V Varnished 7-times
- $\checkmark$ Techno grey colour



Sorting guidelines	Design
Healthy knots	allowed (partly filled)
Black knots	allowed (partly filled)
Healthy red heart	allowed
Healthy heartwood	allowed
Cracks	allowed (partly filled)
Curled spots   differences in structure	allowed
Natural differences in colour	allowed
Natural fiber orientation	allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	not allowed
Red or brown spots	allowed
Stains from storage and light blueness	allowed
Knocked spots	not allowed
Mirror	not allowed


Symbol picture - may vary in colour and structure

Thickness:	15 mm	Useful layer: approx. 5 mm
Width:	150 mm	
Length:	Lengthsyste	em 6 layers 1900 mm
	(8 layers   pl	kg.) 2 layers 950 mm*
Connection:	Tongue and	groove
	One layer 950 m	m consists of 2 boards*
m² pkg. ź	2,28	m² pal. 111,72
kg pkg. ź	23	kg pal. 1127
🗹 Floating	laying	

Glued laying

Technical data

 $\checkmark$ Suitable for underfloor heating when gluing the entire area with solvent-free adhesives

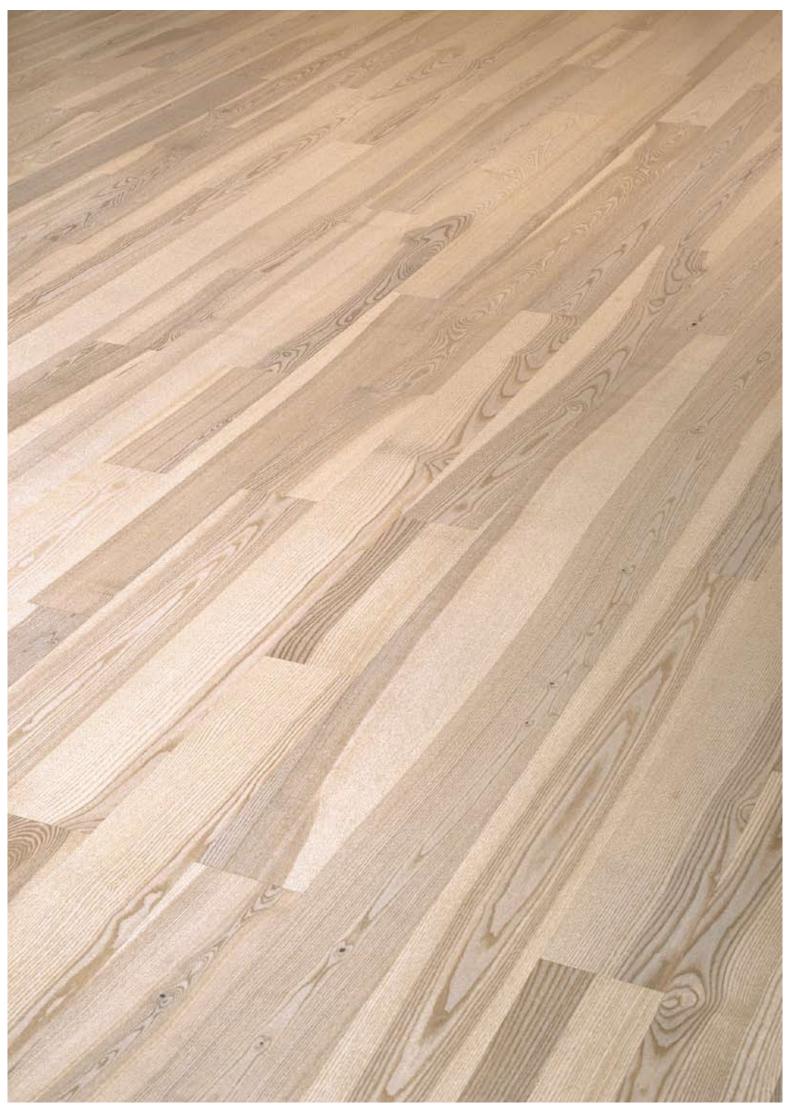

TYPES OF WOOD MAPLE - BEECH natural | steamed - BIRCH - PEAR - ALDER OAK - SMOKED OAK - ASH - CHERRY - BLACK WALNUT - ELM




Woodtype	ASH HEARTWOOD
Description	3 layers of the same hardwood. Due to the brushing and the special treatment with oil   wax pearl white, the Core Ash with heartwood receives a white to brownish colour. The sorting Design is slightly to very knotty, with a lively structure.
Brinell hardness Gross density	4,5 kp 0,69 g   cm³

# 1-Strip Country House Flooring ASH Heartwood Design "Krems"

### Surfaces


- $\checkmark$ Oil | Wax oxidative dried
- $\checkmark$ Brushed
- $\checkmark$ Bevel 2 mm (4-sides)
- V Pearl white colour

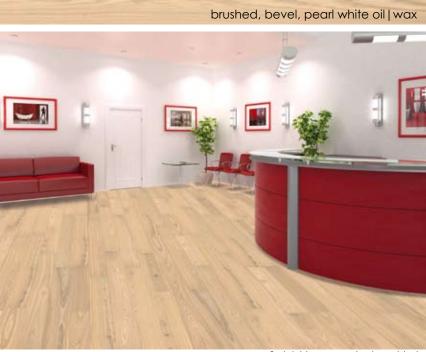

Sorting guidelines	Design
Healthy knots	allowed (partly filled)
Black knots	allowed (partly filled)
Healthy red heart	allowed
Healthy heartwood	allowed
Cracks	allowed (partly filled)
Curled spots   differences in structure	allowed
Natural differences in colour	allowed
Natural fiber orientation	allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	not allowed
Red or brown spots	allowed
Stains from storage and light blueness	allowed
Knocked spots	not allowed
Mirror	not allowed

Technical data	
Thickness: 15 mm	Useful layer: approx. 5 mm
Width: 150 mm	···· , · · · · · ·
Length: Lengthsy	vstem 6 layers 1900 mm
(8 layers	pkg.) 2 layers 950 mm*
Connection: Tongue	and groove
One layer 95	50 mm consists of 2 boards*
m² pkg. 2,28	m² pal. 111,72
kg pkg. 23	kg pal. 1127
Floating laying	

- $\checkmark$ Glued laying
- $\checkmark$ Suitable for underfloor heating when gluing the entire area with solvent-free adhesives

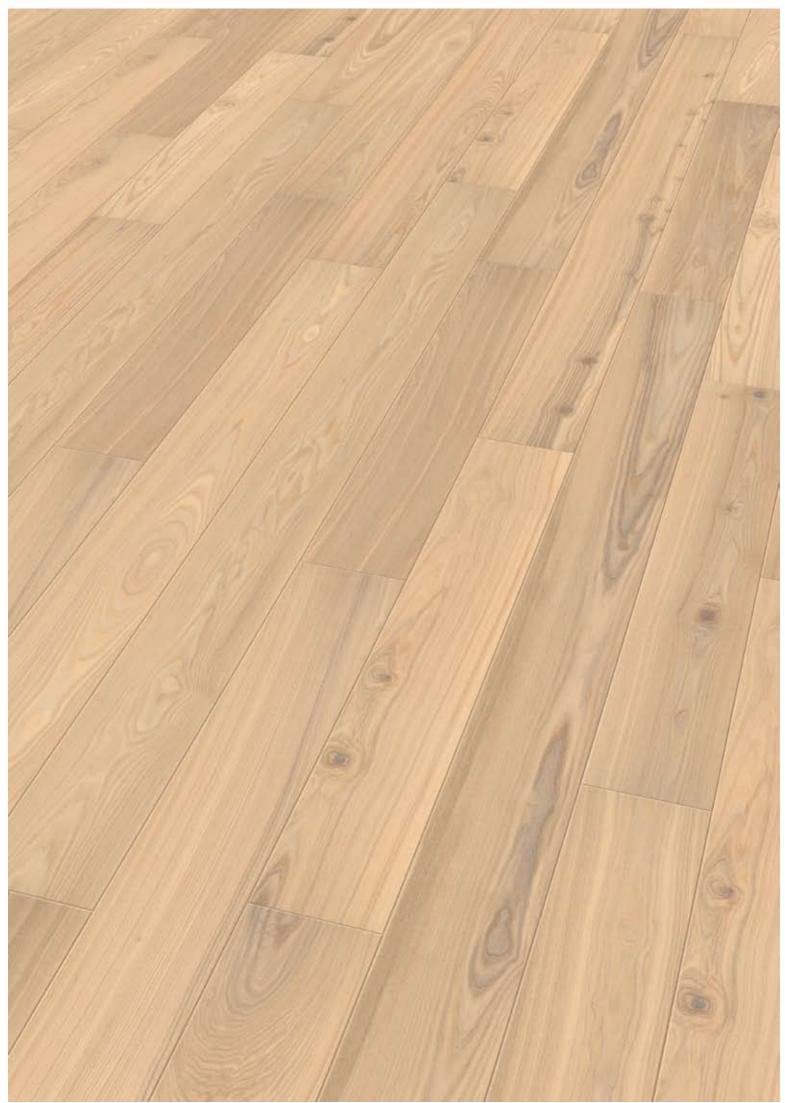

Symbol picture - may vary in colour and structure

 TYPES OF WOOD
 MAPLE - BEECH natural | steamed - BIRCH - PEAR - ALDER

 OAK - SMOKED OAK - ASH - CHERRY - BLACK WALNUT - ELM



Woodtype	ASH steamed
Description	3 layers of the same hardwood. The Ash receives a slightly reddish brown colour due to the steaming with vitalized Grander water and the heartwood lends the parquet a natural appearance. The sorting Design is slightly to very knotty, with a lively structure.
Brinell hardness Gross density	4,5 kp 0,69 g   cm³

# 1-Strip Country House Flooring ASH steamed Design "Telfs"



- Oil | Wax oxidative dried
- Varnished 7-times
- Untreated sanded
- 🗹 Brushed
- 🗹 Bevel
- Special colour

### Also available as

System board (Fixed length 1100 mm)



Sorting guidelines	Design
Healthy knots	allowed (partly filled)
Black knots	allowed (partly filled)
Healthy red heart	allowed
Healthy heartwood	allowed
Cracks	allowed (partly filled)
Curled spots   differences in structure	allowed
Natural differences in colour	allowed
Natural fiber orientation	allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	not allowed
Red or brown spots	allowed
Stains from storage and light blueness	allowed
Knocked spots	not allowed
Mirror	not allowed

Technical data		
Thickness: 1	5 mm	Useful layer: approx. 5 mm
Width: 1	50 mm	,
Length: Le	engthsyste	m 6 layers 1900 mm
3)	3 layers   pk	(g.) 2 layers 950 mm*
Connection: To	ongue and	groove
0	ne layer 950 mn	n consists of 2 boards*
m² pkg. 2,2	28	m² pal. 111,72
kg pkg. 23		kg pal. 1127
🗹 Floating la	iying	

- Glued laying
- Suitable for underfloor heating when gluing the entire area with solvent-free adhesives



Symbol picture - may vary in colour and structure

OAK - SMOKED OAK - ASH - CHERRY - BLACK WALNUT - ELM



Woodtype	ASH
Description	3 layers of the same hardwood. The Ash without heartwood has a light yellow to brownish colour. The sorting Klassiker is essentially knot-free*, with a simple structure.
Brinell hardness Gross density	4,5 kp 0,69 g   cm³

# 2-Strip Plank Flooring ASH "Klassiker"

### Surfaces

- 1 Oil | wax oxidative dried
- 1 Varnished 7-times
- $\checkmark$ Untreated sanded
- Brushed
- V Bevel
- Special colour




Technical data

Sorting guidelines	Klassiker
Healthy knots	till ø 5 mm allowed
Black knots	till ø 5 mm allowed
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	not allowed
Curled spots   differences in structure	scattered allowed
Natural differences in colour	slightly allowed
Natural fiber orientation	scattered allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	not allowed
Red or brown spots	not allowed
Stains from storage and light blueness	not allowed
Knocked spots	not allowed
Mirror	not allowed

Symbol picture - can vary in colour and structur

Thickness: Width:	15 mm 140 mm	Useful layer: approx. 5 mm
Length:	Fixed length (8 layers   pl	
Connection:	. ,	0 /
m² pkg. 2	,69	m² pal. 112,98
kg pkg. 2	6,2	kg pal. 1104
<ul><li>Floating</li><li>Glued la</li></ul>		

Suitable for underfloor heating when gluing the entire area with solvent-free adhesives

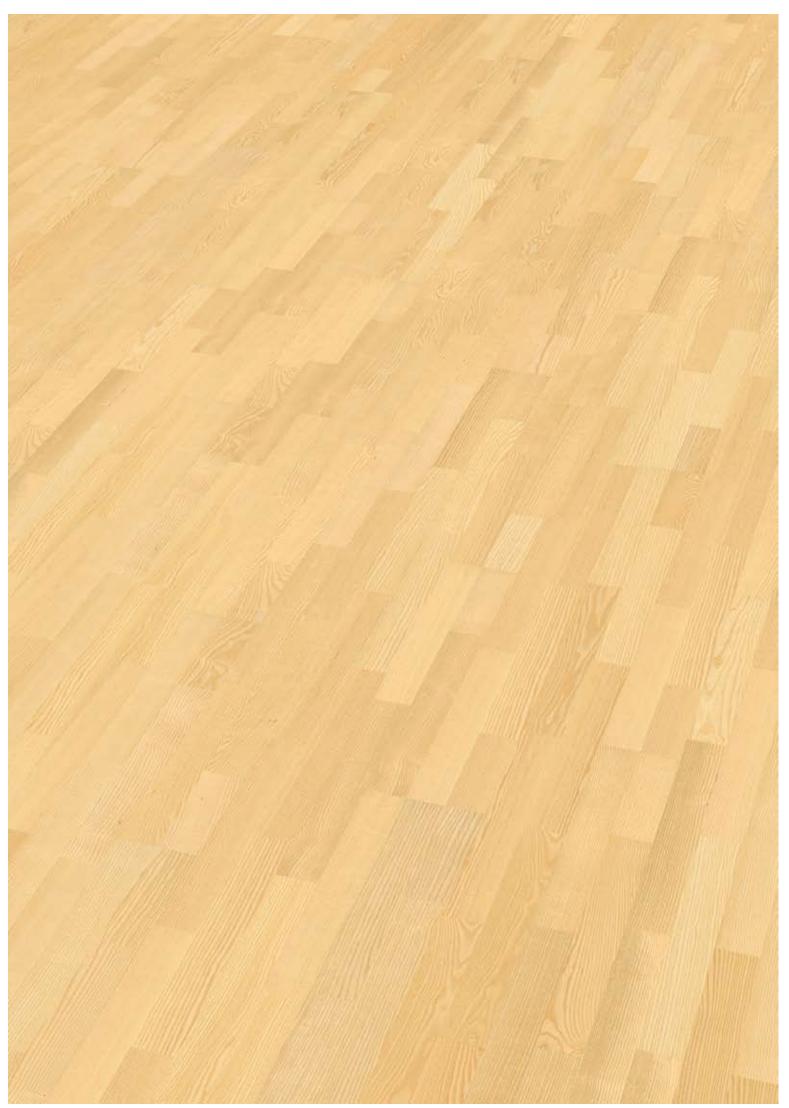

Symbol picture - may vary in colour and structure

 TYPES OF WOOD
 MAPLE - BEECH natural | steamed - BIRCH

OAK - SMOKED OAK - ASH - CHERRY - BLACK WALNUT - ELM



Woodtype	ASH
Description	3 layers of the same hardwood. The Ash with heartwood has a light yellow to slightly brownish to prominent dark brown colour. The sorting Trend-Epoca is knotty, with a lively structure.
Brinell hardness Gross density	4,5 kp 0,69 g   cm³

# 2-Strip Plank Flooring ASH "Trend-Epoca"

### Surfaces

- Oil | Wax oxidative dried
- Varnished 7-times
- Untreated sanded
- 🗹 Brushed
- 🗹 Bevel
- Special colour




Sorting guidelines	Trend-Epoca
Healthy knots	allowed (partly filled)
Black knots	allowed (partly filled)
Healthy red heart	allowed
Healthy heartwood	allowed
Cracks	allowed (partly filled)
Curled spots   differences in structure	allowed
Natural differences in colour	allowed
Natural fiber orientation	allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	not allowed
Red or brown spots	allowed
Stains from storage and light blueness	allowed
Knocked spots	not allowed
Mirror	not allowed

### Technical data

	mm ) mm	Useful laye	er: approx. 5 mm
Length: Fixe	ed length		
(8	ayers   pkg	g.)	
Connection: Tor	1gue and g	proove	
m² pkg. 2,69	,	m² pal.	112,98
kg pkg. 26,2	2	kg pal.	1104
<ul> <li>Floating lay</li> <li>Glued lavin</li> </ul>	•		

- Glued laying
- Suitable for underfloor heating when gluing the entire area with solvent-free adhesives

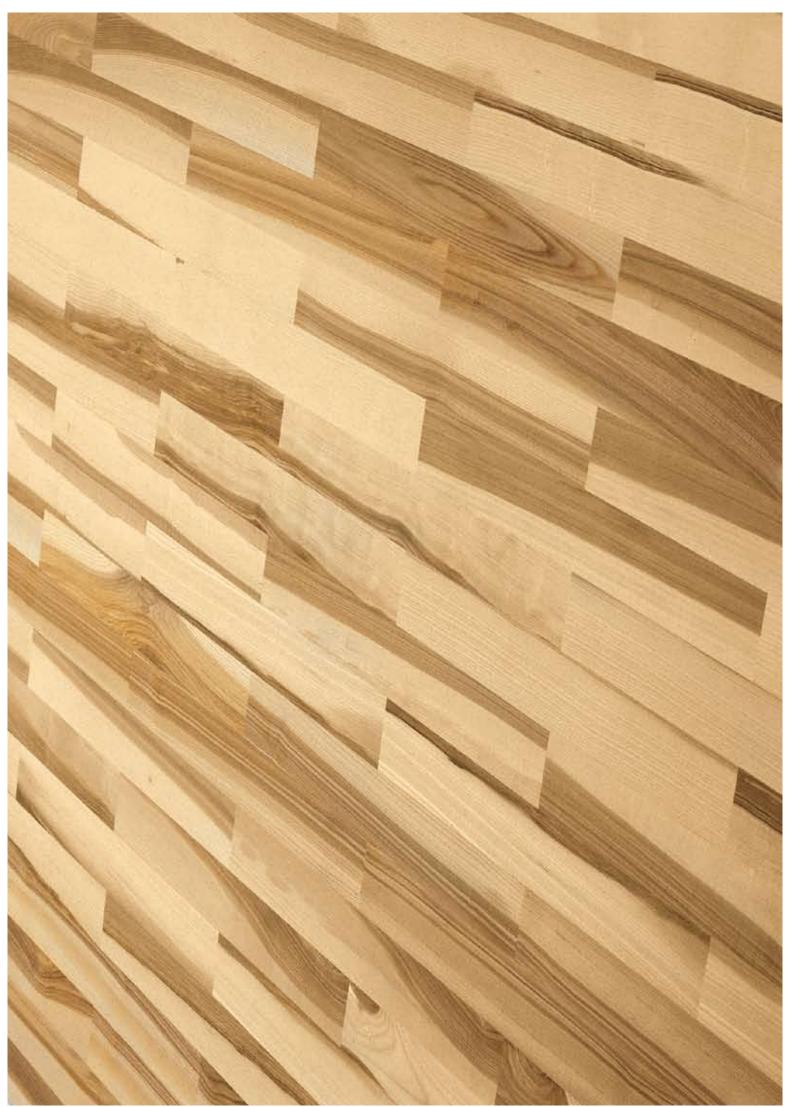

 TYPES OF WOOD
 MAPLE - BEECH natural | steamed - BIRCH - PEAR - ALDER

 OAK - SMOKED OAK - ASH - CHERRY - BLACK WALNUT - ELM



Woodtype	ASH steamed
Description	3 layers of the same hardwood. Due to the steaming with vitalized Grander water, the Ash without heartwood receives a brown colour. The sorting Trend-Epoca is knotty with a lively structure and heartwood.
Brinell hardness Gross density	4,5 kp 0,69 g   cm³

# 1-Strip Plank Flooring ASH steamed "Trend-Epoca"



### Surfaces

- Oil | Wax oxidative dried
- Varnished 7-times
- Untreated sanded
- 🗹 Brushed
- 🗹 Bevel
- Special colour

Sorting guidelines	Trend-Epoca
Healthy knots	till Ø 5 mm allowed
Black knots	till Ø 5 mm allowed
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	not allowed
Curled spots   differences in structure	partly allowed
Natural differences in colour	partly allowed
Natural fiber orientation	partly allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	not allowed
Red or brown spots	not allowed
Stains from storage and light blueness	not allowed
Knocked spots	not allowed
Mirror	not allowed

Technical data	
Thickness: 15 mm	Useful layer: approx. 5 mm
	stem: 2400 mm
(8 layers   Connectioln: Tongue a	
m² pkt. 2,69	m² pal. 112,98
kg pkt. 26,2	kg pal. 1104
<ul> <li>Floating laying</li> <li>Glued laying</li> <li>Suitable for underfloor heating</li> </ul>	
when gluing the entire area with solvent-free adhesives	