

Woodtype	CHERRY	steamed
----------	--------	---------

3 layers of the same hardwood. Due to the steaming with vitalized Description

Grander water, the Cherry receives a silk-matt, slightly reddish to deep reddish brown colour. The sorting Wohngefühl is knotty, with a

medium structure.

Brinell hardness 3,5 kp Gross density 0,66 g | cm³

1-Strip Country House Flooring CHERRY steamed Wohngefühl "Schönbrunn"



Surfaces

- ✓ Oil | Wax oxidative dried
- ✓ Varnished 7-times
- Untreated sanded
- ✓ Bevel

Also available as

System board (Fixed length 1100 mm)



Sorting guidelines	Wohngefühl
Healthy knots	allowed (partly filled)
Black knots	to approx. 35 mm allowed (partly filled)
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	scattered allowed (partly filled)
Curled spots differences in structure	scattered allowed
Natural differences in colour	allowed
Natural fiber orientation	to 1 3 allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	allowed
Red or brown spots	scattered allowed
Stains from storage and light blueness	not allowed
Knocked spots	not allowed
Mirror	not allowed

Technical data			
Thickness: 15 mm	Useful layer: approx. 5 mm		
Width: 150 mm	, , , , , , , , , , , , , , , , , , , ,		
Length: Lengthsyste	em 6 layers 1900 mm		
(8 layers p	kg.) 2 layers 950 mm*		
Connection: Tongue and groove			
One layer 950 m	m consists of 2 boards*		
m² pkg. 2,28	m² pal. 111,72		
kg pkg. 23	kg pal. 1127		
Floating layingGlued layingSuitable for underfloating	oor heating		

when gluing the entire area with solvent-free adhesives



Symbol picture - may vary in colour and structure



Woodtype	CHERRY steamed
Description	3 layers of the same hardwood. Due to the steaming with vitalized Grander water, the Cherry receives a silk-matt, slightly reddish to deep reddish brown colour. The sorting Ambiente is slightly to medium knotty, with a lively structure.
Brinell hardness	3.5 kp

Gross density 0,66 g | cm³

1-Strip Country House Flooring CHERRY steamed Ambiente City Star "Brüssel"



Surfaces

- ✓ Oil | Wax oxidative dried
- ✓ Varnished 7-times
- Untreated sanded
- ✓ Bevel

Also available as

- 2-lengths system
- Ladder optic
- Herringbone 475 mm 1
- Herringbone 950 mm




Symbol picture - may vary in colour and structure

Sorting guidelines	Ambiente
Healthy knots	to ø 10 mm allowed (partly filled)
Black knots	to ø 10 mm allowed (partly filled)
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	not allowed
Curled spots differences in structure	allowed
Natural differences in colour	allowed
Natural fiber orientation	allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	allowed
Red or brown spots	allowed
Stains from storage and light blueness	allowed
Knocked spots	allowed
Mirror	not allowed

Technical do	ata		
Thickness: Width:	15 mm		Useful layer: approx. 5 mm
Length:	Lengthsys	stem*	* 5 layers 1900 mm
	(8 Layers	Pkg.	.) 3 layers 950 mm**
	Lengthsys	stem	6 layers 950 mm**
	(8 Layers	Pkg.) 2 layers 475 mm***
Connection:		50 mm	consists of 2 boards** consists of 2 boards***
m² Pkg. 1,8	3* 0,91	m²	² Pal. 89,67* 57,33
kg Pkg. 18* 9		kg	g Pal. 882* 567
✓ Floating Id✓ Glued Ia✓ Suitable	ying	floo	or heating

when gluing the entire area with solvent-free adhesives

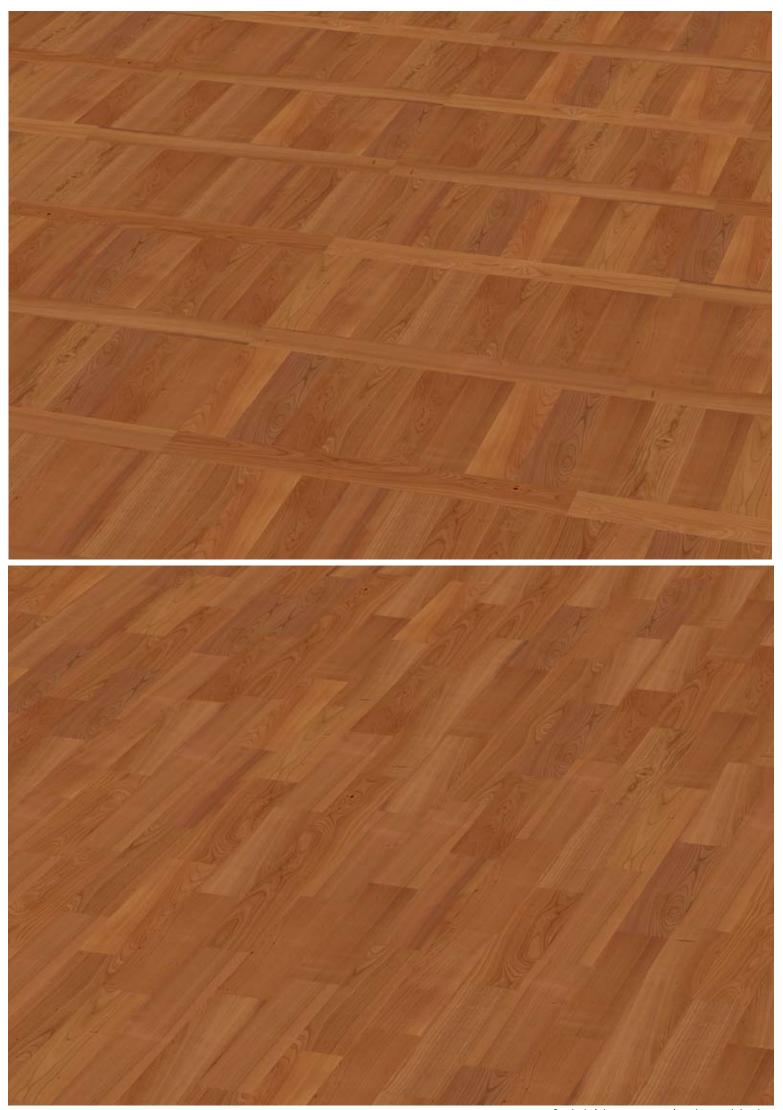

Symbol picture - may vary in colour and structure



Woodtype	CHERRY	steamed
----------	--------	---------

3 layers of the same hardwood. Due to the steaming with vitalized Description

Grander water, the Cherry receives a silk-matt, slightly reddish to deep reddish brown colour. The sorting Klassiker is essentially knot-free*,

with a simple structure.

Brinell hardness 3,5 kp Gross density 0,66 g | cm³

2-Strip Plank Flooring CHERRY steamed "Klassiker"



Surfaces

- ✓ Oil | Wax oxidative dried
- ✓ Varnished 7-times
- Untreated sanded
- ✓ Bevel
- Special colour

Also available as

✓ Herringbone 475 mm



Symbol picture - may vary in colour and structure

Sorting guidelines	Klassiker
Healthy knots	scattered to ø 5 mm allowed
Black knots	scattered to ø 5 mm allowed
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	not allowed
Curled spots differences in structure	scattered allowed
Natural differences in colour	partly allowed
Natural fiber orientation	partly allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	not allowed
Red or brown spots	scattered allowed
Stains from storage and light blueness	not allowed
Knocked spots	not allowed
Mirror	not allowed

ı	\sim	 ical	 м	u

Thickness: 15 mm Useful layer: approx. 5 mm

Width: 140 mm

Length: Fixed length 2400 mm

(8 layers | pkg.)

Connection: Tongue and groove

m² | pkg. 2,69

m² | pal. 112,98


kg|pkg. 26,2

kg|pal. 1104

Floating laying

Glued laying

Suitable for underfloor heating when gluing the entire area with solvent-free adhesives

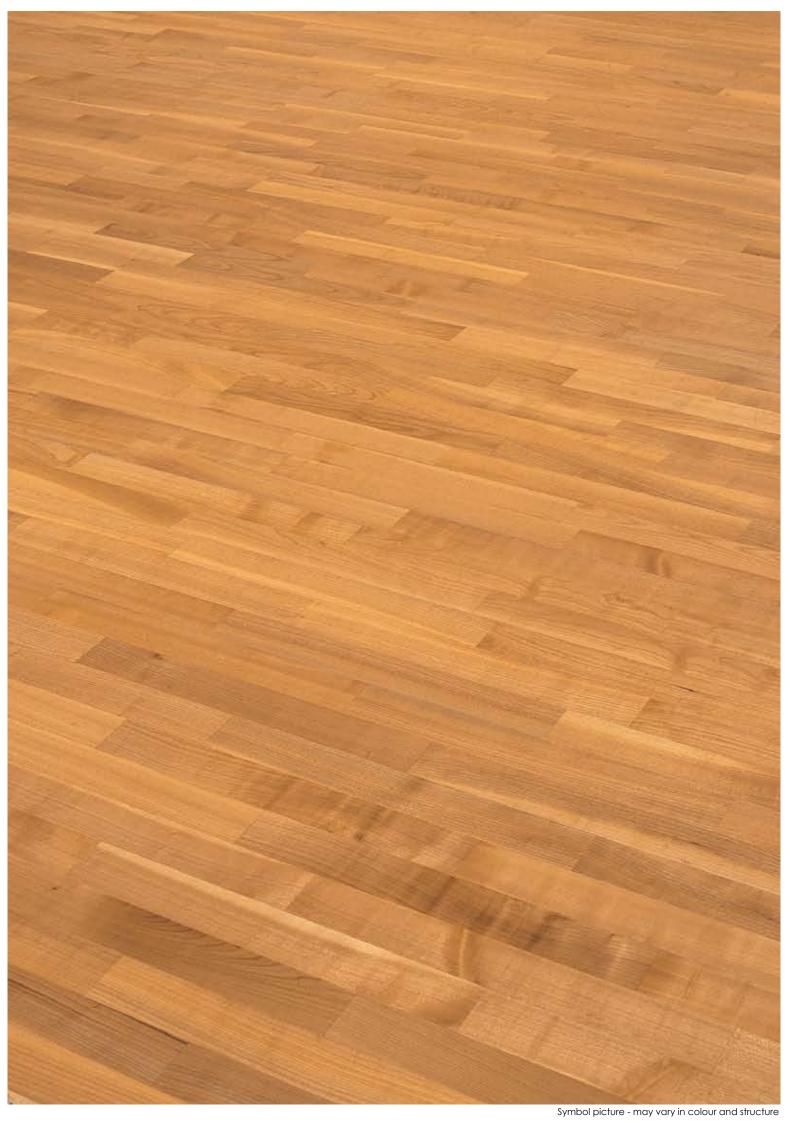



Woodtype	CLIEDDY	
	CHERRY	steamed

Description 3 layers of the same hardwood. Due to the steaming with vitalized Grander

water, the Cherry receives a silk-matt, slightly reddish to deep reddish brown

colour. The sorting Klassiker is essentially knot-free*, with a lively structure.

3,5 kp Brinell hardness 0,66 g | cm3 Gross density

2-Strip Plank Flooring CHERRY steamed Klassiker "Herringbone"









Surfaces

- ✓ Oil | Wax oxidative dried
- ✓ Varnished 7-times
- Untreated sanded
- ✓ Bevel
- Special colour



Symbol picture - may vary in colour and structure

Sorting guidelines	Klassiker
Healthy knots	scattered to ø 5 mm allowed
Black knots	scattered to ø 5 mm allowed
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	not allowed
Curled spots differences in structure	scattered allowed
Natural differences in colour	partly allowed
Natural fiber orientation	partly allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	not allowed
Red or brown spots	scattered allowed
Stains from storage and light blueness	not allowed
Knocked spots	not allowed
Mirror	not allowed

6 M 1 M M	1 ~ 1 ~ 1
	l data

Thickness: 15 mm Useful layer: approx. 5 mm

Width: 140 mm

Length: Fixed length 1 layer 475 mm

(8 layers | 16 pieces | pkg.)

Connection: Tongue and groove

One layer 475 mm consists of 2 boards***

m² | pkg. 1,06

m² | pal. 51,94

kg|pkg. 10,3

kg|pal. 505

- Floating laying
- Glued laying
- Suitable for underfloor heating when gluing the entire area with solvent-free adhesives



Symbol picture - may vary in colour and structure