

Woodtype	<b>ELM steamed</b>
Description	3 layers of the same hardwood. Due to the steaming with vitalized Grander water, the Elm receives a light brown to dark brown colour. The sorting Design is slightly to very knotty, with a lively structure.
Brinell hardness	4,3 kp
Gross density	0,65 g   cm <sup>3</sup>

## 1-Strip Country House Flooring ELM steamed Design "Bern"



### Surfaces

- Oil | wax oxidative dried
- Varnished 7-times
- Untreated sanded
- Bevel
- Special colour

### Also available as


- System board  
(Fixed length 1100 mm)



Symbol picture - may vary in colour and structure

Sorting guidelines	Design
Healthy knots	allowed (partly filled)
Black knots	allowed (partly filled)
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	allowed (partly filled)
Curled spots   differences in structure	allowed
Natural differences in colour	allowed
Natural fiber orientation	allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	allowed
Red or brown spots	allowed
Stains from storage and light blueness	allowed
Knocked spots	not allowed
Mirror	not allowed

Technical data					
Thickness:	15 mm <span style="background-color: #e0e0e0;">Useful layer: approx. 5 mm</span>				
Width:	150 mm				
Length:	Lengthsystem 6 layers 1900 mm (8 layers   pkg.) 2 layers 950 mm*				
Connection:	Tongue and groove <small>One layer 950 mm consists of 2 boards*</small>				
<table border="1" style="width: 100%;"> <tr> <td>m<sup>2</sup>   pkg. 2,28</td> <td>m<sup>2</sup>   pal. 111,72</td> </tr> <tr> <td>kg   pkg. 23</td> <td>kg   pal. 1127</td> </tr> </table>		m <sup>2</sup>   pkg. 2,28	m <sup>2</sup>   pal. 111,72	kg   pkg. 23	kg   pal. 1127
m <sup>2</sup>   pkg. 2,28	m <sup>2</sup>   pal. 111,72				
kg   pkg. 23	kg   pal. 1127				
<input checked="" type="checkbox"/> Floating laying <input checked="" type="checkbox"/> Glued laying <input checked="" type="checkbox"/> Suitable for underfloor heating <small>when gluing the entire area with solvent-free adhesives</small>					

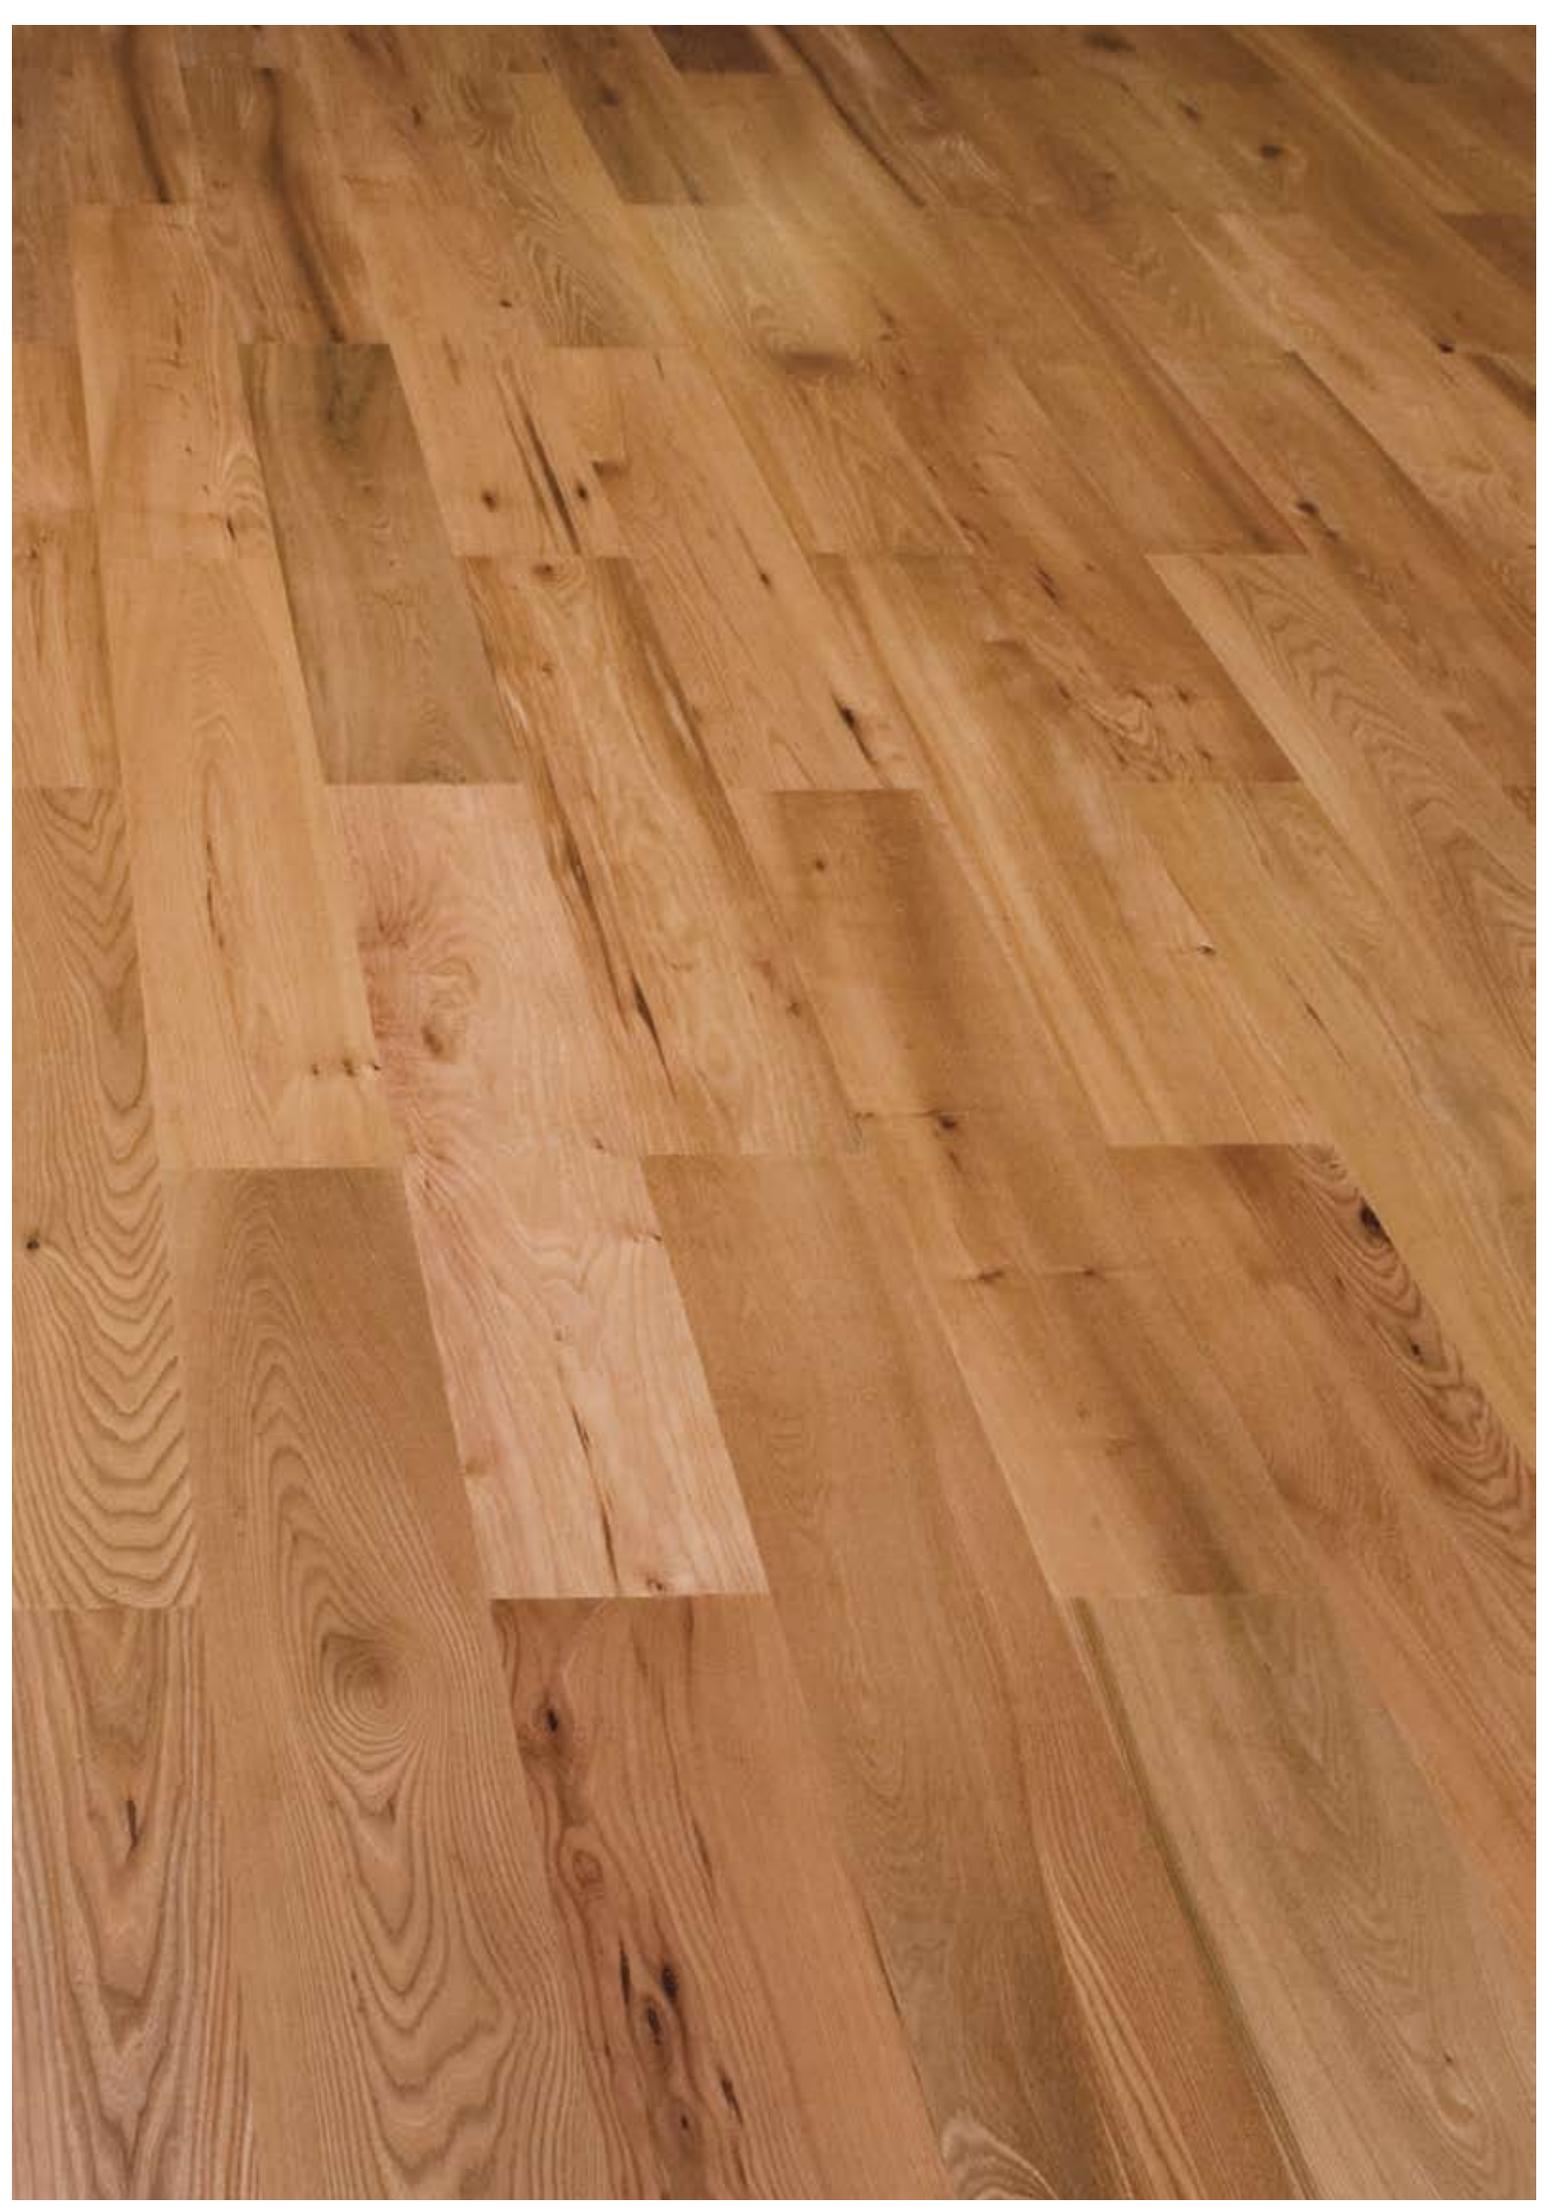

Woodtype	<b>ELM steamed</b>
----------	--------------------

Description	3 layers of the same hardwood. Due to the steaming with vitalized Grander water, the Elm receives a light brown to dark brown colour. The sorting Trend-Epoca is knotty, with a lively structure.
-------------	---

Brinell hardness	4,3 kp
Gross density	0,65 g   cm³

## 2-Strip Plank Flooring ELM steamed "Trend-Epoca"



### Surfaces

- Oil | wax oxidative dried
- Varnished 7-times
- Untreated sanded
- Bevel
- Special colour



Symbol picture - may vary in colour and structure

Sorting guidelines	Trend-Epoca
Healthy knots	allowed (partly filled)
Black knots	allowed (partly filled)
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	allowed (partly filled)
Curled spots   differences in structure	allowed
Natural differences in colour	allowed
Natural fiber orientation	allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	allowed
Red or brown spots	allowed
Stains from storage and light blueness	allowed
Knocked spots	not allowed
Mirror	not allowed

Technical data					
Thickness:	15 mm <span style="background-color: #e0e0e0;">Useful layer: approx. 5 mm</span>				
Width:	140 mm				
Length:	Fixed length 2400 mm (8 layers   pkg.)				
Connection:	Tongue and groove				
<table border="1" style="width: 100%;"> <tr> <td style="width: 50%;">m²   pkg. 2,69</td> <td style="width: 50%;">m²   pal. 112,98</td> </tr> <tr> <td>kg   pkg. 26,2</td> <td>kg   pal. 1104</td> </tr> </table>		m²   pkg. 2,69	m²   pal. 112,98	kg   pkg. 26,2	kg   pal. 1104
m²   pkg. 2,69	m²   pal. 112,98				
kg   pkg. 26,2	kg   pal. 1104				
<input checked="" type="checkbox"/> Floating laying <input checked="" type="checkbox"/> Glued laying <input checked="" type="checkbox"/> Suitable for underfloor heating <span style="font-size: small;">when gluing the entire area with solvent-free adhesives</span>					

