

Woodtype	OAK European
Description	3 layers of the same hardwood. The European Oak has a middle brown to intensive brown colour. The sorting Auslese is essentially knot-free*, with a simple structure.
Brinell hardness	4,2 kp
Gross density	0,71 g cm³

1-Strip Country House Flooring OAK Auslese "Wien"



Surfaces


- Oil | wax oxidative dried
- Varnished 7-times
- Untreated sanded
- Brushed
- Special colour



Symbol picture - may vary in colour and structure

Sorting guidelines	Auslese
Healthy knots	till ø 5 mm allowed
Black knots	till ø 5 mm allowed
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	not allowed
Curled spots differences in structure	scattered allowed
Natural differences in colour	slightly allowed
Natural fiber orientation	scattered allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	not allowed
Red or brown spots	not allowed
Stains from storage and light blueness	not allowed
Knocked spots	not allowed
Mirror	light mirror alongside allowed

Technical data					
Thickness:	15 mm Useful layer: approx. 5 mm				
Width:	150 mm				
Length:	Lengthsystem 6 layers 1900 mm (8 layers pkg.) 2 layers 950 mm*				
Connection:	Tongue and groove <small>One layer 950 mm consists of 2 boards*</small>				
<table border="1" style="width: 100%;"> <tr> <td>m² pkg. 2,28</td> <td>m² pal. 111,72</td> </tr> <tr> <td>kg pkg. 23</td> <td>kg pal. 1127</td> </tr> </table>		m² pkg. 2,28	m² pal. 111,72	kg pkg. 23	kg pal. 1127
m² pkg. 2,28	m² pal. 111,72				
kg pkg. 23	kg pal. 1127				
<input checked="" type="checkbox"/> Floating laying <input checked="" type="checkbox"/> Glued laying <input checked="" type="checkbox"/> Suitable for underfloor heating <small>when gluing the entire area with solvent-free adhesives</small>					

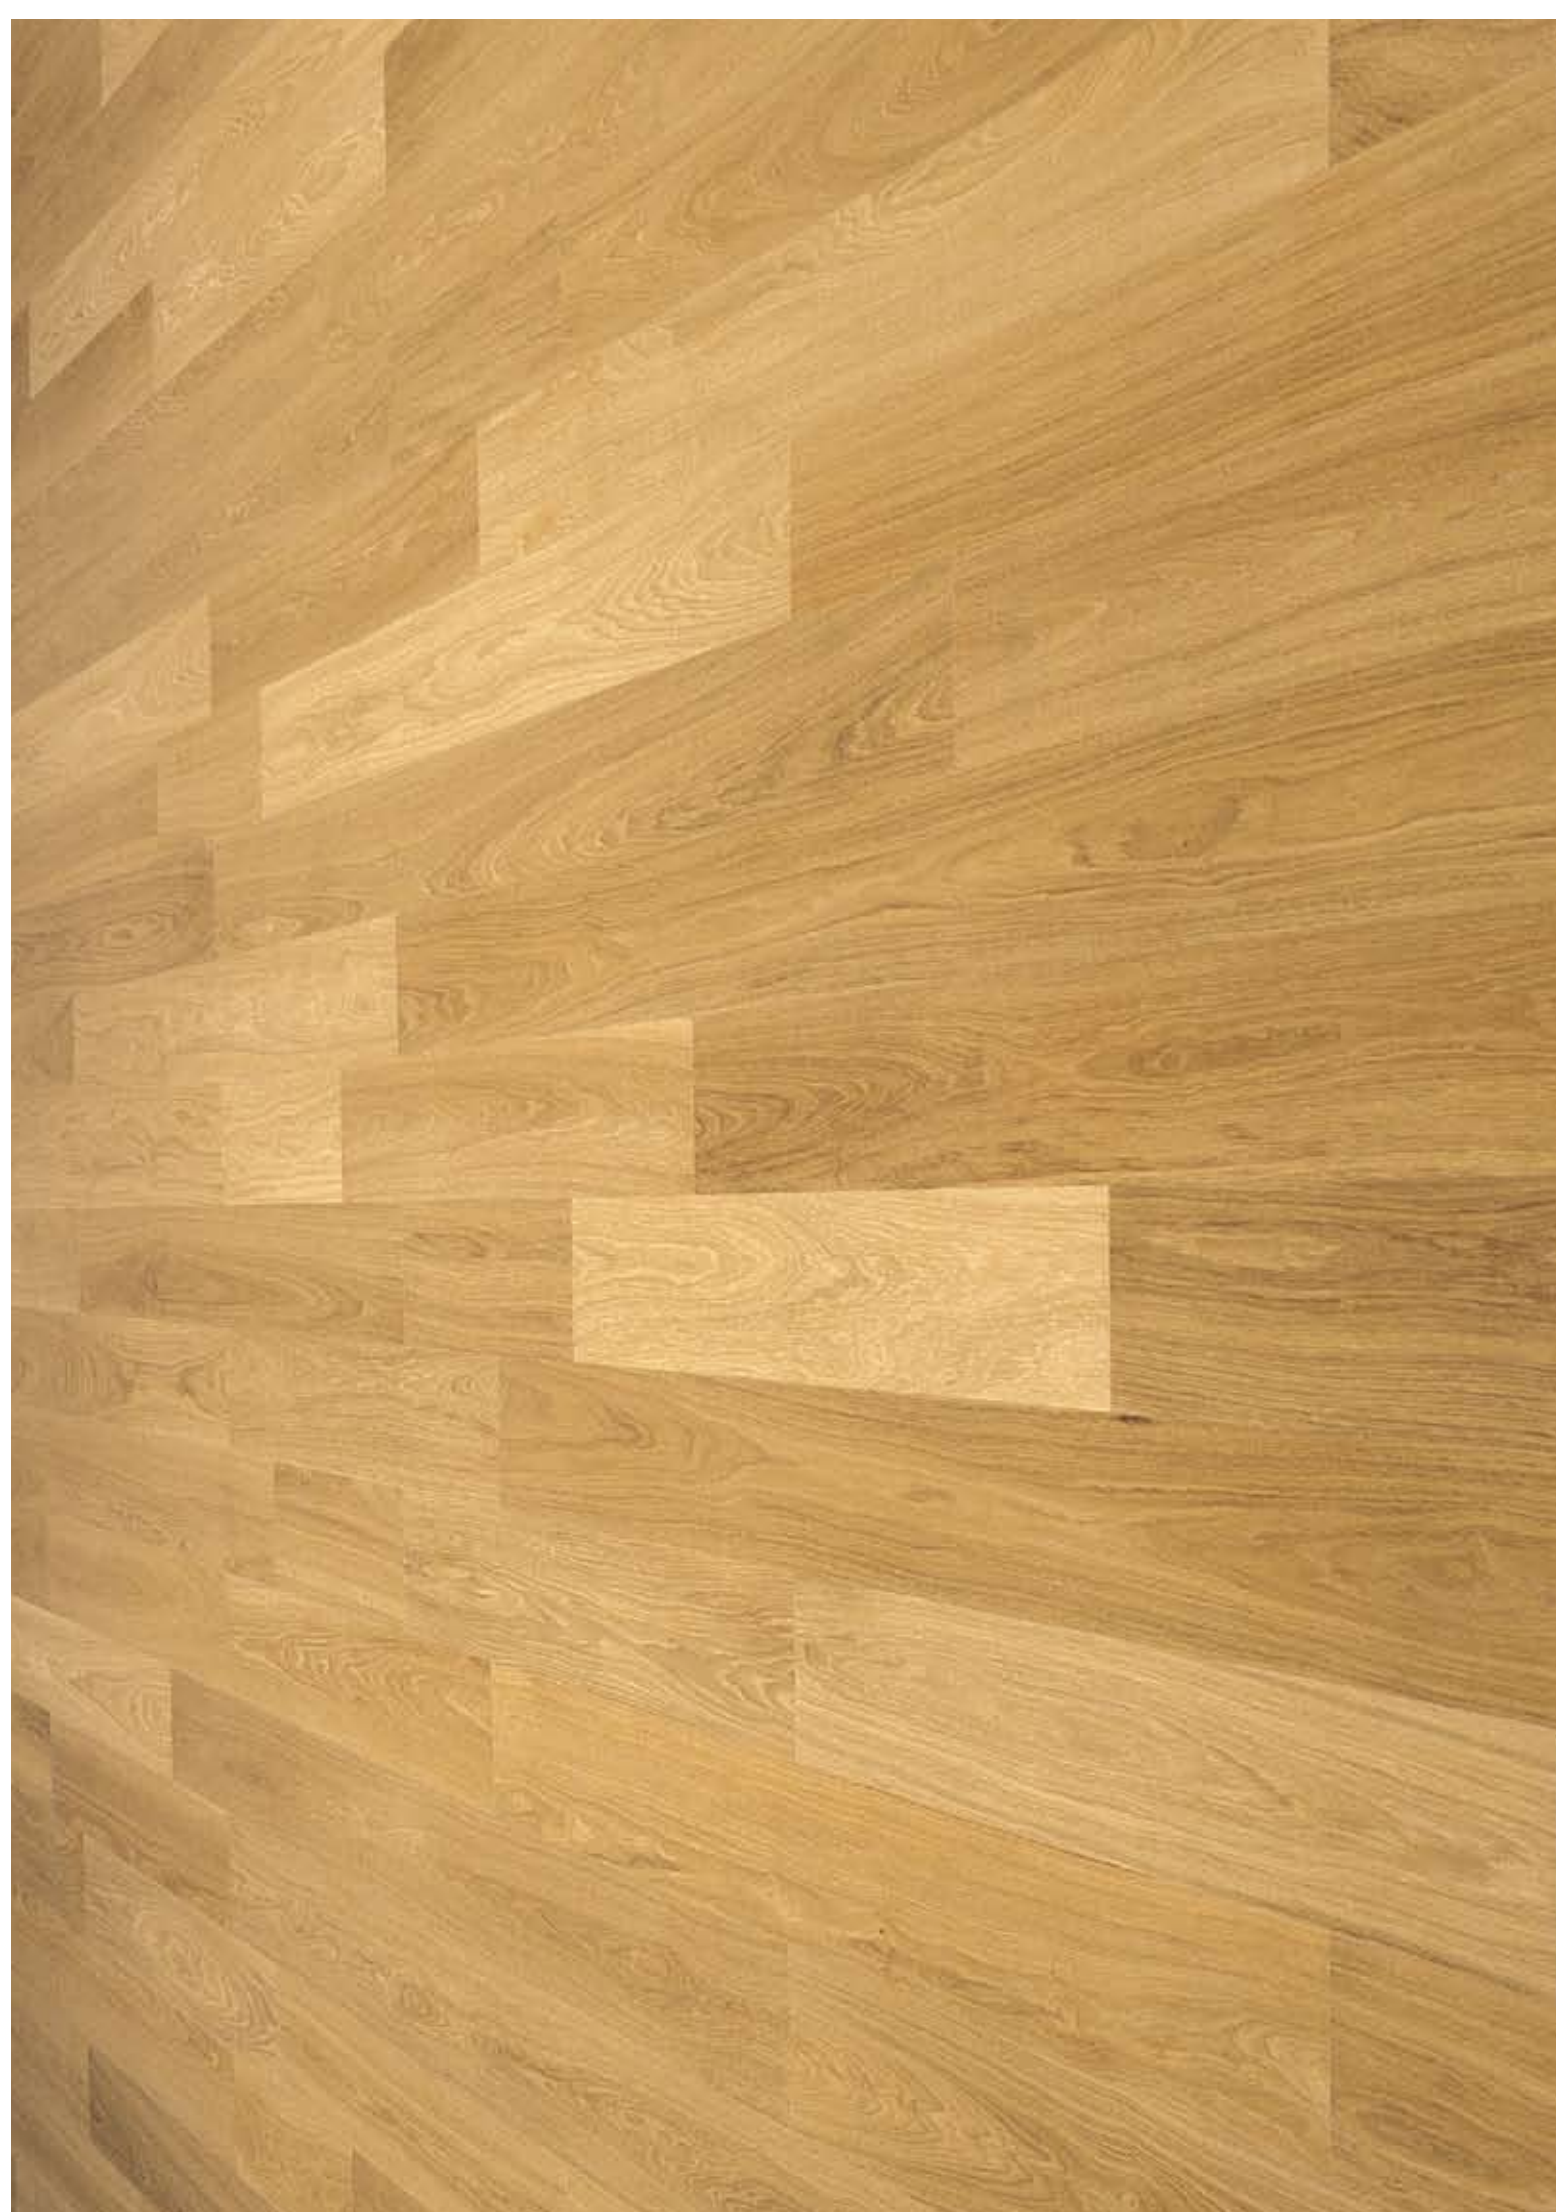

Woodtype	OAK European
Description	3 layers of the same hardwood. The European Oak has a middle brown to intensive brown colour. The sorting Wohngefühl is knotty, with a medium structure.
Brinell hardness	4,2 kp
Gross density	0,71 g cm³

1-Strip Country House Flooring OAK Wohngefühl "Baden"



Surfaces

- Oil | wax oxidative dried
- Varnished 7-times
- Untreated sanded
- Brushed
- Bevel
- Special colour

Also available as

- System board
(Fixed length 1100 mm)



Symbol picture - may vary in colour and structure

Sorting guidelines	Wohngefühl
Healthy knots	allowed (partly filled)
Black knots	to approx. 35 mm allowed (partly filled)
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	scattered allowed (partly filled)
Curled spots differences in structure	scattered allowed
Natural differences in colour	allowed
Natural fiber orientation	to 1 3 allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	not allowed
Red or brown spots	scattered allowed
Stains from storage and light blueness	not allowed
Knocked spots	not allowed
Mirror	alongside and crosswise slightly allowed

Technical data					
Thickness:	15 mm Useful layer: approx. 5 mm				
Width:	150 mm				
Length:	Lengthsystem 6 layers 1900 mm (8 layers pkg.) 2 layers 950 mm*				
Connection:	Tongue and groove <small>One layer 950 mm consists of 2 boards*</small>				
<table border="1" style="width: 100%;"> <tr> <td>m² pkg. 2,28</td> <td>m² pal. 111,72</td> </tr> <tr> <td>kg pkg. 23</td> <td>kg pal. 1127</td> </tr> </table>		m² pkg. 2,28	m² pal. 111,72	kg pkg. 23	kg pal. 1127
m² pkg. 2,28	m² pal. 111,72				
kg pkg. 23	kg pal. 1127				
<ul style="list-style-type: none"> <input checked="" type="checkbox"/> Floating laying <input checked="" type="checkbox"/> Glued laying <input checked="" type="checkbox"/> Suitable for underfloor heating <small>when gluing the entire area with solvent-free adhesives</small> 					



Woodtype **OAK European**

Description 3 layers of the same hardwood. The European Oak has a middle brown to intensive brown colour. The sorting Design is slightly to very knotty, with a lively structure.

Brinell hardness 4,2 kp
Gross density 0,71 g | cm³

1-Strip Country House Flooring OAK Design "Villach"




Surfaces

- Oil | wax oxidative dried
- Varnished 7-times
- Untreated sanded
- Brushed
- Bevel
- Special colour

Also available as

- System board
(Fixed length 1100 mm)
- Kreativ 10,7 mm

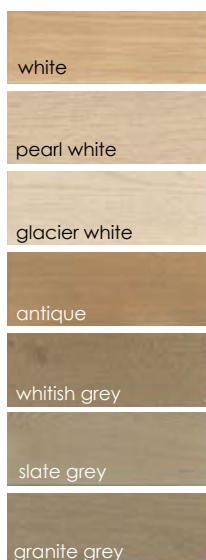

Symbol picture - may vary in colour and structure

Sorting guidelines	Design
Healthy knots	allowed (partly filled)
Black knots	allowed (partly filled)
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	allowed (partly filled)
Curled spots differences in structure	allowed
Natural differences in colour	allowed
Natural fiber orientation	allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	partly allowed
Red or brown spots	allowed
Stains from storage and light blueness	allowed
Knocked spots	not allowed
Mirror	alongside and crosswise allowed

Technical data					
Thickness:	15 mm Useful layer: approx. 5 mm				
Width:	150 mm				
Length:	Lengthsystem 6 layers 1900 mm (8 layers pkg.) 2 layers 950 mm*				
Connection:	Tongue and groove <small>One layer 950 mm consists of 2 boards*</small>				
<table border="0" style="width: 100%;"> <tr> <td style="border: 1px solid black; padding: 5px;">m² pkg. 2,28</td> <td style="border: 1px solid black; padding: 5px;">m² pal. 111,72</td> </tr> <tr> <td style="border: 1px solid black; padding: 5px;">kg pkg. 23</td> <td style="border: 1px solid black; padding: 5px;">kg pal. 1127</td> </tr> </table>		m² pkg. 2,28	m² pal. 111,72	kg pkg. 23	kg pal. 1127
m² pkg. 2,28	m² pal. 111,72				
kg pkg. 23	kg pal. 1127				
<ul style="list-style-type: none"> <input checked="" type="checkbox"/> Floating laying <input checked="" type="checkbox"/> Glued laying <input checked="" type="checkbox"/> Suitable for underfloor heating <small>when gluing the entire area with solvent-free adhesives</small> 					



Woodtype **OAK European**

Description 3 layers of the same hardwood. The European Oak has a middle brown to intensive brown colour. The sorting Design is slightly to very knotty, with a lively structure.

Brinell hardness 4,2 kp
 Gross density 0,71 g | cm³

1-Strip Country House Flooring OAK Design "Villach" B190



Surfaces

- Oil | wax oxidative dried
- Varnished 7-times
- Untreated sanded
- Brushed
- Bevel
- Special colour



Symbol picture - may vary in colour and structure

Sorting guidelines	Design
Healthy knots	allowed (partly filled)
Black knots	allowed (partly filled)
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	allowed (partly filled)
Curled spots differences in structure	allowed
Natural differences in colour	allowed
Natural fiber orientation	allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	partly allowed
Red or brown spots	allowed
Stains from storage and light blueness	allowed
Knocked spots	not allowed
Mirror	alongside and crosswise allowed

Technical data					
Thickness:	15 mm Useful layer: approx. 5 mm				
Width:	190 mm				
Length:	Lengthsystem 5 layers 1900 mm (6 layers pkg.) 1 layer 950 mm*				
Connection:	Tongue and groove <small>One layer 950 mm consists of 2 boards*</small>				
<table border="0" style="width: 100%;"> <tr> <td style="border: 1px solid black; padding: 5px;">m² pkg. 2,17</td> <td style="border: 1px solid black; padding: 5px;">m² pal. 97,65</td> </tr> <tr> <td style="border: 1px solid black; padding: 5px;">kg pkg. 22</td> <td style="border: 1px solid black; padding: 5px;">kg pal. 990</td> </tr> </table>		m² pkg. 2,17	m² pal. 97,65	kg pkg. 22	kg pal. 990
m² pkg. 2,17	m² pal. 97,65				
kg pkg. 22	kg pal. 990				
<ul style="list-style-type: none"> <input checked="" type="checkbox"/> Floating laying <input checked="" type="checkbox"/> Glued laying <input checked="" type="checkbox"/> Suitable for underfloor heating <small>when gluing the entire area with solvent-free adhesives</small> 					



Woodtype **OAK European**

Description 3 layers of the same hardwood. The European Oak has a middle brown to intensive brown colour. The special feature is the white pore. The sorting Design is slightly to very knotty, with a lively structure.


Brinell hardness 4,2 kp
 Gross density 0,71 g | cm³

1-Strip Country House Flooring OAK Design "Weißenkirchen"



Surfaces

- Oil | wax oxidative dried
- Brushed
- Pore white

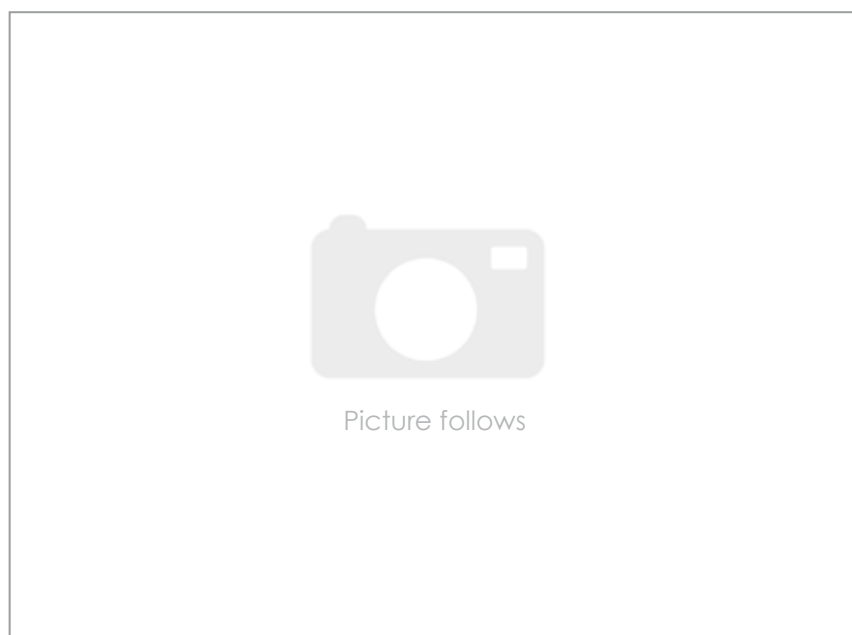

NOVELTIES

Sorting guidelines	Design
Healthy knots	allowed (partly filled)
Black knots	allowed (partly filled)
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	allowed (partly filled)
Curled spots differences in structure	allowed
Natural differences in colour	allowed
Natural fiber orientation	allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	scattered allowed
Red or brown spots	allowed
Stains from storage and light blueness	allowed
Knocked spots	not allowed
Mirror	alongside and crosswise allowed

Technical data					
Thickness:	15 mm Useful layer: approx. 5 mm				
Width:	150 mm				
Length:	Lengthsystem 6 layers 1900 mm (8 layers pkg.) 2 layers 950 mm*				
Connection:	Tongue and groove <small>One layer 950 mm consists of 2 boards*</small>				
<table border="0" style="width: 100%;"> <tr> <td style="border: 1px solid black; padding: 5px;">m² pkg. 2,28</td> <td style="border: 1px solid black; padding: 5px;">m² pal. 111,72</td> </tr> <tr> <td style="border: 1px solid black; padding: 5px;">kg pkg. 23</td> <td style="border: 1px solid black; padding: 5px;">kg pal. 1127</td> </tr> </table>		m² pkg. 2,28	m² pal. 111,72	kg pkg. 23	kg pal. 1127
m² pkg. 2,28	m² pal. 111,72				
kg pkg. 23	kg pal. 1127				
<input checked="" type="checkbox"/> Floating laying <input checked="" type="checkbox"/> Glued laying <input checked="" type="checkbox"/> Suitable for underfloor heating <small>when gluing the entire area with solvent-free adhesives</small>					

Woodtype **OAK European**

Description 3 layers of the same hardwood. The European Oak has a middle brown to intensive brown colour. The sorting Emotion is essentially knot-free*, with a medium structure.


Brinell hardness 4,2 kp
 Gross density 0,71 g | cm³

1-Strip Country House Flooring OAK Emotion "Wien-Oberlaa"



Surfaces

- Oil | wax oxidative dried
- Varnished 7-times
- Untreated sanded
- Brushed
- Special colour

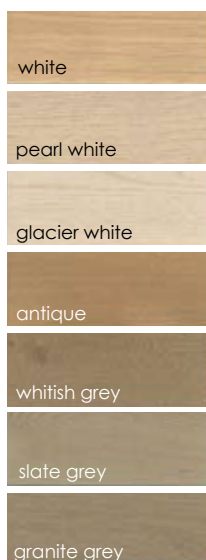

Symbol picture - may vary in colour and structure

Sorting guidelines	Emotion
Healthy knots	allowed (max. Ø 5 mm partly filled)
Black knots	allowed (max. Ø 5 mm partly filled)
Healthy red heart	allowed (max. Ø 5 mm partly filled)
Healthy heartwood	not allowed
Cracks	scattered allowed (partly filled)
Curled spots differences in structure	allowed
Natural differences in colour	allowed
Natural fiber orientation	to 1 3 allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	not allowed
Red or brown spots	scattered allowed
Stains from storage and light blueness	not allowed
Knocked spots	not allowed
Mirror	alongside and crosswise slightly allowed

Technical data					
Thickness:	15 mm Useful layer: approx. 5 mm				
Width:	150 mm				
Length:	Lengthsystem 6 layers 1900 mm (8 layers pkg.) 2 layers 950 mm*				
Connection:	Tongue and groove <small>One layer 950 mm consists of 2 boards*</small>				
<table border="0" style="width: 100%;"> <tr> <td style="border: 1px solid black; padding: 5px;">m² pkg. 2,28</td> <td style="border: 1px solid black; padding: 5px;">m² pal. 111,72</td> </tr> <tr> <td style="border: 1px solid black; padding: 5px;">kg pkg. 23</td> <td style="border: 1px solid black; padding: 5px;">kg pal. 1127</td> </tr> </table>		m ² pkg. 2,28	m ² pal. 111,72	kg pkg. 23	kg pal. 1127
m ² pkg. 2,28	m ² pal. 111,72				
kg pkg. 23	kg pal. 1127				
<ul style="list-style-type: none"> <input checked="" type="checkbox"/> Floating laying <input checked="" type="checkbox"/> Glued laying <input checked="" type="checkbox"/> Suitable for underfloor heating <small>when gluing the entire area with solvent-free adhesives</small> 					



Woodtype **OAK European**

Description 3 layers of the same hardwood. The European Oak has a middle brown to intensive brown colour. The sorting Emotion is essentially knot-free*, with a medium structure.

Brinell hardness 4,2 kp
 Gross density 0,71 g | cm³

1-Strip Country House Flooring OAK Emotion "Wien-Oberlaa" B190



Surfaces


- Oil | wax oxidative dried
- Varnished 7-times
- Untreated sanded
- Brushed
- Special colour



Symbol picture - may vary in colour and structure

Sorting guidelines	Emotion
Healthy knots	allowed (max. Ø 5 mm partly filled)
Black knots	allowed (max. Ø 5 mm partly filled)
Healthy red heart	allowed (max. Ø 5 mm partly filled)
Healthy heartwood	not allowed
Cracks	scattered allowed (partly filled)
Curled spots differences in structure	allowed
Natural differences in colour	allowed
Natural fiber orientation	to 1 3 allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	not allowed
Red or brown spots	scattered allowed
Stains from storage and light blueness	not allowed
Knocked spots	not allowed
Mirror	alongside and crosswise slightly allowed

Technical data					
Thickness:	15 mm Useful layer: approx. 5 mm				
Width:	190 mm				
Length:	Lengthsystem 5 layers 1900 mm (6 layers pkg.) 1 layer 950 mm*				
Connection:	Tongue and groove <small>One layer 950 mm consists of 2 boards*</small>				
<table border="0" style="width: 100%;"> <tr> <td style="border: 1px solid black; padding: 5px;">m² pkg. 2,17</td> <td style="border: 1px solid black; padding: 5px;">m² pal. 97,65</td> </tr> <tr> <td style="border: 1px solid black; padding: 5px;">kg pkg. 22</td> <td style="border: 1px solid black; padding: 5px;">kg pal. 990</td> </tr> </table>		m ² pkg. 2,17	m ² pal. 97,65	kg pkg. 22	kg pal. 990
m ² pkg. 2,17	m ² pal. 97,65				
kg pkg. 22	kg pal. 990				
<ul style="list-style-type: none"> <input checked="" type="checkbox"/> Floating laying <input checked="" type="checkbox"/> Glued laying <input checked="" type="checkbox"/> Suitable for underfloor heating <small>when gluing the entire area with solvent-free adhesives</small> 					

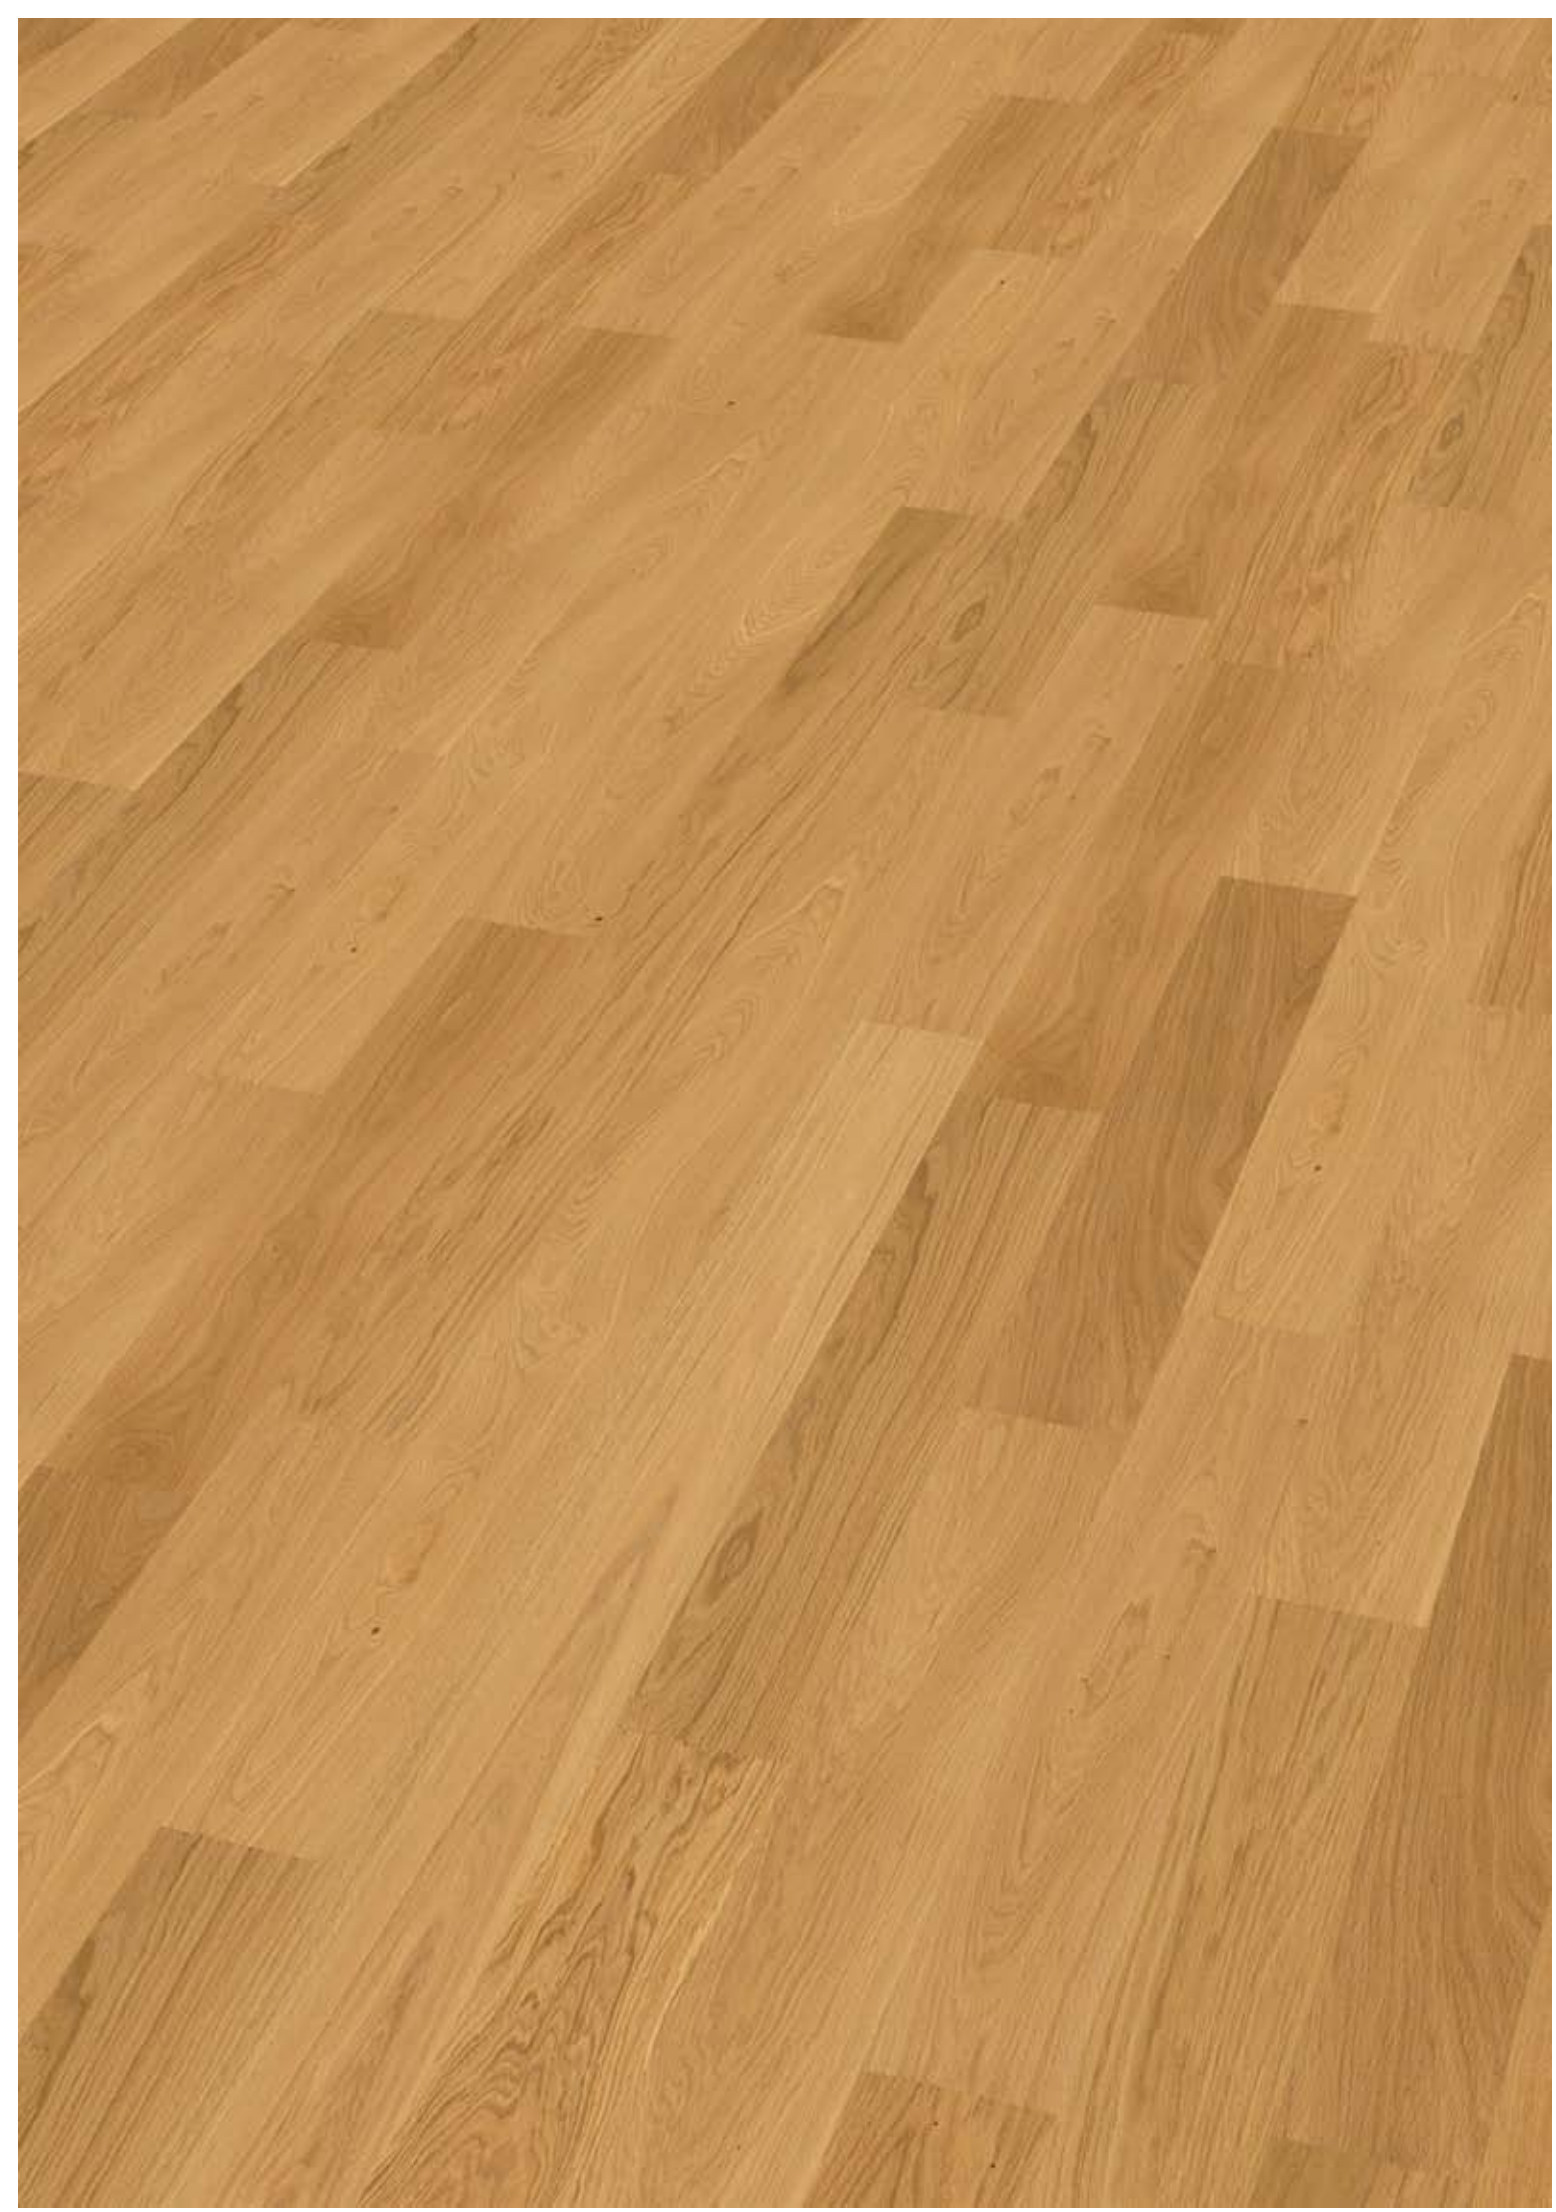

Woodtype **OAK European**

Description 3 layers of the same hardwood. The European Oak has a middle brown to intensive brown colour. The sorting Ambiente is slightly to medium knotty, with a lively structure.

Brinell hardness 4,2 kp
 Gross density 0,71 g | cm³

1-Strip Country House Flooring OAK Ambiente City Star "London"




Surfaces

- Oil | wax oxidative dried
- Varnished 7-times
- Untreated sanded
- Brushed
- Bevel
- Special colour

Also available as

- 2-lengths system
- Ladder optic
- Herringbone 475 mm**
- Herringbone 950 mm

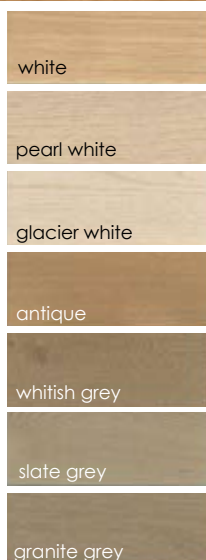

Symbol picture - may vary in colour and structure

Sorting guidelines	Ambiente
Healthy knots	fill ø 10 mm allowed (partly filled)
Black knots	fill ø 10 mm allowed (partly filled)
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	not allowed
Curled spots differences in structure	allowed
Natural differences in colour	allowed
Natural fiber orientation	allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	not allowed
Red or brown spots	allowed
Stains from storage and light blueness	not allowed
Knocked spots	not allowed
Mirror	alongside and crosswise allowed

Technical data					
Thickness:	15 mm Useful layer: approx. 5 mm				
Width:	120 mm				
Length:	Lengthsystem* 6 layers 1900 mm				
	(8 Layers Pkg.) 2 layers 950 mm**				
	Lengthsystem 6 layers 950 mm				
	(8 Layers Pkg.) 2 layers 475 mm**				
Connection:	Tongue and groove <small>One layer 950 mm consists of 2 boards** One layer 475 mm consists of 2 boards**</small>				
<table border="1" style="width: 100%;"> <tr> <td>m² Pkg. 1,83* 0,91</td> <td>m² Pal. 102,48* 50,96</td> </tr> <tr> <td>kg Pkg. 18* 9</td> <td>kg Pal. 1008* 460</td> </tr> </table>		m ² Pkg. 1,83* 0,91	m ² Pal. 102,48* 50,96	kg Pkg. 18* 9	kg Pal. 1008* 460
m ² Pkg. 1,83* 0,91	m ² Pal. 102,48* 50,96				
kg Pkg. 18* 9	kg Pal. 1008* 460				
<ul style="list-style-type: none"> <input type="checkbox"/> Floating laying <input checked="" type="checkbox"/> Glued laying <input checked="" type="checkbox"/> Suitable for underfloor heating <small>when gluing the entire area with solvent-free adhesives</small> 					



Woodtype **OAK European**


Description 3 layers of the same hardwood. The European Oak has a middle brown to intensive brown colour. The sorting Ambiente is slightly to medium knotty with a lively structure.

Brinell hardness 4,2 kp
Gross density 0,71 g | cm³



Surfaces

- Oil | wax oxidative dried
- Varnished 7-times
- Untreated sanded
- Brushed
- Bevel
- Special colour

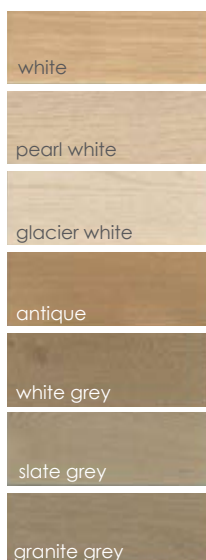

Symbol picture - may vary in colour and structure

Sorting guidelines	Ambiente
Healthy knots	fill ø 10 mm allowed (partly filled)
Black knots	fill ø 10 mm allowed (partly filled)
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	not allowed
Curled spots differences in structure	allowed
Natural differences in colour	allowed
Natural fiber orientation	allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	not allowed
Red or brown spots	allowed
Stains from storage and light blueness	not allowed
Knocked spots	not allowed
Mirror	alongside and crosswise allowed

Technical data					
Thickness:	15 mm Useful layer: approx. 5 mm				
Width:	120 mm				
Length:	Fixlength 475* mm or 950** mm (8 Lagen Pkt.)				
Connection:	Tongue and groove				
	<small>One layer 950 mm consists of 1 board* One layer 475 mm consists of 2 boards**</small>				
<table border="1" style="width: 100%;"> <tr> <td>m² Pkg. 0,91</td> <td>m² Pal. 50,96</td> </tr> <tr> <td>kg Pkg. 9</td> <td>kg Pal. 504</td> </tr> </table>		m² Pkg. 0,91	m² Pal. 50,96	kg Pkg. 9	kg Pal. 504
m² Pkg. 0,91	m² Pal. 50,96				
kg Pkg. 9	kg Pal. 504				
<input checked="" type="checkbox"/> Floating laying <input checked="" type="checkbox"/> Glued laying <input checked="" type="checkbox"/> Suitable for underfloor heating when gluing the entire area with solvent-free adhesives					



Symbol pictures - can vary in colour and structure

Woodtype	OAK European
Description	3 layers of the same hardwood. Due to the special treatment with oil wax black, the surface of the European Oak receives a pleasantly warm, reddish brown colour. The sorting Ambiente is slightly to very knotty, with a lively structure.
Brinell hardness	4,2 kp
Gross density	0,71 g cm ³

1-Strip Country House Flooring OAK Ambiente "Dürnstein"



Surfaces

- Oil | wax oxidative dried
- Brushed
- Bevel
- Pore black



Symbol picture - may vary in colour and structure

Sorting guidelines	Ambiente
Healthy knots	allowed (partly filled)
Black knots	allowed (partly filled)
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	allowed (partly filled)
Curled spots differences in structure	allowed
Natural differences in colour	allowed
Natural fiber orientation	allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	allowed
Red or brown spots	allowed
Stains from storage and light blueness	allowed
Knocked spots	not allowed
Mirror	alongside and crosswise allowed

Technical data					
Thickness:	15 mm Useful layer: approx. 5 mm				
Width:	150 mm				
Length:	Lengthsystem 6 layers 1900 mm (8 layers pkg.) 2 layers 950 mm*				
Connection:	Tongue and groove <small>One layer 950 mm consists of 2 boards*</small>				
<table border="1" style="width: 100%;"> <tr> <td>m² pkg. 2,28</td> <td>m² pal. 111,72</td> </tr> <tr> <td>kg pkg. 23</td> <td>kg pal. 1127</td> </tr> </table>		m ² pkg. 2,28	m ² pal. 111,72	kg pkg. 23	kg pal. 1127
m ² pkg. 2,28	m ² pal. 111,72				
kg pkg. 23	kg pal. 1127				
<input checked="" type="checkbox"/> Floating laying <input checked="" type="checkbox"/> Glued laying <input checked="" type="checkbox"/> Suitable for underfloor heating <small>when gluing the entire area with solvent-free adhesives</small>					



Woodtype **OAK European**

Description 3 layers of the same hardwood. The European Oak has a middle brown to intensive brown colour. Special features are the naturally grown, numerous knots. The sorting Ambiente is medium to very knotty, with a lively structure.

Brinell hardness 4,2 kp
 Gross density 0,71 g | cm³

1-Strip Country House Flooring OAK Ambiente "Rust"



brushed, bevel

Surfaces

- Oil | wax oxidative dried
- Brushed
- Bevel 2 mm



Symbol picture - may vary in colour and structure

Sorting guidelines	Ambiente
Healthy knots	allowed (partly filled)
Black knots	allowed (partly filled)
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	allowed (filled in black)
Curled spots differences in structure	allowed
Natural differences in colour	allowed
Natural fiber orientation	allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	allowed
Red or brown spots	allowed
Stains from storage and light blueness	allowed
Knocked spots	allowed
Mirror	alongside and crosswise allowed

Technical data	
Thickness:	15 mm Useful layer: approx. 5 mm
Width:	150 mm
Length:	Lengthsystem 6 layers 1900 mm (8 layers pkg.) 2 layers 950 mm*
Connection:	Tongue and groove <small>One layer 950 mm consists of 2 boards*</small>
m ² pkg.	2,28
m ² pal.	111,72
kg pkg.	23
kg pal.	1127
<input checked="" type="checkbox"/> Floating laying <input checked="" type="checkbox"/> Glued laying <input checked="" type="checkbox"/> Suitable for underfloor heating <small>when gluing the entire area with solvent-free adhesives</small>	



Symbol picture - may vary in colour and structure

Woodtype **OAK European**

Description 3 layers of the same hardwood. The European Oak has a middle brown to intensive brown colour. Special features are the naturally grown, numerous knots. The sorting Ambiente is medium to very knotty, with a lively structure.

Brinell hardness 4,2 kp
 Gross density 0,71 g | cm³

1-Strip Country House Flooring OAK Ambiente "Rust" B190, 2 mm bevel



brushed, bevel

Surfaces

- Oil | wax oxidative dried
- Brushed
- Bevel 2 mm



Symbol picture - may vary in colour and structure

Sorting guidelines	Ambiente
Healthy knots	allowed (partly filled)
Black knots	allowed (partly filled)
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	allowed (filled in black)
Curled spots differences in structure	allowed
Natural differences in colour	allowed
Natural fiber orientation	allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	allowed
Red or brown spots	allowed
Stains from storage and light blueness	allowed
Knocked spots	allowed
Mirror	alongside and crosswise allowed

Technical data					
Thickness:	15 mm Useful layer: approx. 5 mm				
Width:	190 mm				
Length:	Lengthsystem 5 layers 1900 mm (6 layers pkg.) 1 layer 950 mm*				
Connection:	Tongue and groove One layer 950 mm consists of 2 boards*				
<table border="0" style="width: 100%;"> <tr> <td style="border: 1px solid black; padding: 5px;">m² pkg. 2,17</td> <td style="border: 1px solid black; padding: 5px;">m² pal. 97,65</td> </tr> <tr> <td style="border: 1px solid black; padding: 5px;">kg pkg. 22</td> <td style="border: 1px solid black; padding: 5px;">kg pal. 990</td> </tr> </table>		m ² pkg. 2,17	m ² pal. 97,65	kg pkg. 22	kg pal. 990
m ² pkg. 2,17	m ² pal. 97,65				
kg pkg. 22	kg pal. 990				
<input checked="" type="checkbox"/> Floating laying <input checked="" type="checkbox"/> Glued laying <input checked="" type="checkbox"/> Suitable for underfloor heating when gluing the entire area with solvent-free adhesives					



Symbol picture - may vary in colour and structure

Woodtype **OAK European**

Description 3 layers of the same hardwood. The European Oak has a middle brown to reddish brown colour. Special features are the natural colour differences (light | dark). The sorting Ambiente is mottled, slightly to very knotty, with a lively structure.

Brinell hardness 4,2 kp
Gross density 0,71 g | cm³

1-Strip Country House Flooring OAK Ambiente "Sölden"



brushed, white

Surfaces

- Oil | wax oxidative dried
- Varnished 7-times
- Untreated sanded
- Brushed
- Bevel
- Special colour



Symbol picture - may vary in colour and structure

Sorting guidelines	Ambiente
Healthy knots	allowed (partly filled)
Black knots	allowed (partly filled)
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	not allowed
Curled spots differences in structure	allowed
Natural differences in colour	allowed
Natural fiber orientation	allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	partly allowed
Red or brown spots	allowed
Stains from storage and light blueness	allowed
Knocked spots	not allowed
Mirror	alongside and crosswise allowed

Technical data					
Thickness:	15 mm Useful layer: approx. 5 mm				
Width:	150 mm				
Length:	Lengthsystem 6 layers 1900 mm (8 layers pkg.) 2 layers 950 mm*				
Connection:	Tongue and groove <small>One layer 950 mm consists of 2 boards*</small>				
<table border="0" style="width: 100%;"> <tr> <td style="border: 1px solid black; padding: 5px;">m² pkg. 2,28</td> <td style="border: 1px solid black; padding: 5px;">m² pal. 111,72</td> </tr> <tr> <td style="border: 1px solid black; padding: 5px;">kg pkg. 23</td> <td style="border: 1px solid black; padding: 5px;">kg pal. 1127</td> </tr> </table>		m² pkg. 2,28	m² pal. 111,72	kg pkg. 23	kg pal. 1127
m² pkg. 2,28	m² pal. 111,72				
kg pkg. 23	kg pal. 1127				
<input checked="" type="checkbox"/> Floating laying <input checked="" type="checkbox"/> Glued laying <input checked="" type="checkbox"/> Suitable for underfloor heating <small>when gluing the entire area with solvent-free adhesives</small>					



Woodtype	OAK European
Description	3 layers of the same hardwood. The European Oak has a middle brown to reddish brown colour. The special feature is the occasional occurring sapwood. The sorting Ambiente is slightly to very knotty, with a lively structure.
Brinell hardness	4,2 kp
Gross density	0,71 g cm ³

1-Strip Country House Flooring OAK Ambiente "Lech"



brushed, white

Surfaces

- Oil | wax oxidative dried
- Brushed
- Special colour white

Also available as

- Kreativ 10,7 mm



Symbol picture - may vary in colour and structure

Sorting guidelines	Ambiente
Healthy knots	allowed (partly filled)
Black knots	allowed (partly filled)
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	allowed (partly filled)
Curled spots differences in structure	allowed
Natural differences in colour	allowed
Natural fiber orientation	allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	allowed
Red or brown spots	allowed
Stains from storage and light blueness	allowed
Knocked spots	not allowed
Mirror	not allowed

Technical data	
Thickness:	15 mm Useful layer: approx. 5 mm
Width:	150 mm
Length:	Lengthsystem 6 layers 1900 mm (8 layers pkg.) 2 layers 950 mm*
Connection:	Tongue and groove <small>One layer 950 mm consists of 2 boards*</small>
m² pkg. 2,28	m² pal. 111,72
kg pkg. 23	kg pal. 1127
<input checked="" type="checkbox"/> Floating laying <input checked="" type="checkbox"/> Glued laying <input checked="" type="checkbox"/> Suitable for underfloor heating <small>when gluing the entire area with solvent-free adhesives</small>	



Woodtype	OAK European
----------	---------------------

Description	3 layers of the same hardwood. The European Oak has a middle brown to brown colour. Special features are the occasional occurring wormholes of varying intensity. The sorting Flair is slightly to very knotty, with a lively structure.
-------------	--

Brinell hardness	4,2 kp
Gross density	0,71 g cm ³

1-Strip Country House Flooring OAK Flair "Bozen" 2 mm bevel



brushed, bevel, antique, partly with wormholes

Surfaces

- Oil | wax oxidative dried
- Brushed
- Bevel 2 mm
- Antique colour
- Partly with wormholes
in varying intensity



Symbol picture - may vary in colour and structure

Sorting guidelines	Flair
Healthy knots	allowed (partly filled)
Black knots	allowed (partly filled)
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	allowed (partly filled)
Curled spots differences in structure	allowed
Natural differences in colour	allowed
Natural fiber orientation	allowed
Wormholes & insect-ate-spots	allowed
Sapwood	partly allowed
Red or brown spots	allowed
Stains from storage and light blueness	allowed
Knocked spots	not allowed
Mirror	alongside and crosswise allowed

Technical data					
Thickness:	15 mm Useful layer: approx. 5 mm				
Width:	150 mm				
Length:	Lengthsystem 6 layers 1900 mm (8 layers pkg.) 2 layers 950 mm*				
Connection:	Tongue and groove <small>One layer 950 mm consists of 2 boards*</small>				
<table border="0" style="width: 100%;"> <tr> <td style="border: 1px solid black; padding: 5px;">m² pkg. 2,28</td> <td style="border: 1px solid black; padding: 5px;">m² pal. 111,72</td> </tr> <tr> <td style="border: 1px solid black; padding: 5px;">kg pkg. 23</td> <td style="border: 1px solid black; padding: 5px;">kg pal. 1127</td> </tr> </table>		m ² pkg. 2,28	m ² pal. 111,72	kg pkg. 23	kg pal. 1127
m ² pkg. 2,28	m ² pal. 111,72				
kg pkg. 23	kg pal. 1127				
<input checked="" type="checkbox"/> Floating laying <input checked="" type="checkbox"/> Glued laying <input checked="" type="checkbox"/> Suitable for underfloor heating <small>when gluing the entire area with solvent-free adhesives</small>					




Woodtype	OAK European
Description	3 layers of the same hardwood. The European Oak has a middle brown to brown colour. Special features are the naturally grown colour differences. The sorting Vintage is slightly to very knotty, with a lively structure.
Brinell hardness	4,2 kp
Gross density	0,71 g cm ³

1-Strip Country House Flooring OAK Vintage "Harvard"



Surfaces

- Oil | wax oxidative dried
- Varnished 7-times
- Untreated sanded
- Brushed
- Bevel
- Special colour

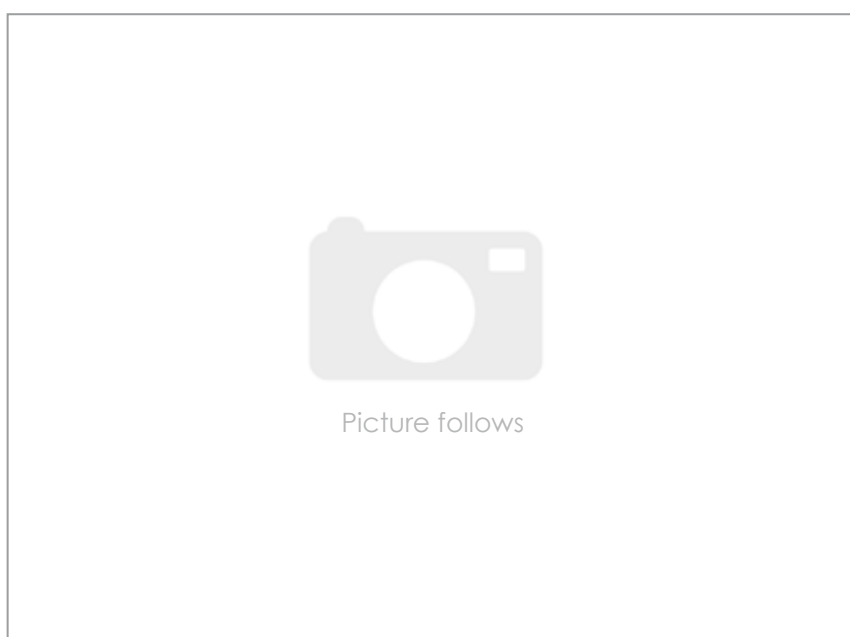

NOVELTIES

Sorting guidelines	Vintage
Healthy knots	allowed
Black knots	allowed
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	allowed (partly filled)
Curled spots differences in structure	allowed
Natural differences in colour	allowed
Natural fiber orientation	allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	scattered allowed
Red or brown spots	allowed
Stains from storage and light blueness	allowed
Knocked spots	not allowed
Mirror	alongside and crosswise allowed

Technical data	
Thickness:	15 mm Useful layer: approx. 5 mm
Width:	150 mm
Length:	Lengthsystem 6 layers 1900 mm (8 layers pkg.) 2 layers 950 mm*
Connection:	Tongue and groove <small>One layer 950 mm consists of 2 boards*</small>
m ² pkg.	2,28
m ² pal.	111,72
kg pkg.	23
kg pal.	1127
<input checked="" type="checkbox"/>	Floating laying
<input checked="" type="checkbox"/>	Glued laying
<input checked="" type="checkbox"/>	Suitable for underfloor heating <small>when gluing the entire area with solvent-free adhesives</small>

Woodtype	OAK European
Description	3 layers of the same hardwood. The European Oak has a middle brown to intensive brown colour. The sorting Design is slightly to very knotty, with a lively structure.
Brinell hardness	4,2 kp
Gross density	0,71 g cm ³

1-Strip Country House Flooring OAK Design "Herringbone"



Surfaces

- Oil | wax oxidative dried
- Varnished 7-times
- Untreated sanded
- Brushed
- Bevel
- Special colour



Symbol picture - may vary in colour and structure

Sorting guidelines	Design
Healthy knots	allowed (partly filled)
Black knots	allowed (partly filled)
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	allowed (partly filled)
Curled spots differences in structure	allowed
Natural differences in colour	allowed
Natural fiber orientation	allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	partly allowed
Red or brown spots	allowed
Stains from storage and light blueness	allowed
Knocked spots	not allowed
Mirror	alongside and crosswise allowed

Technical data	
Thickness:	15 mm
Width:	150 mm
Length:	Fixed length 475* mm or 1100** mm (8 layers pkg)
Connection:	Tongue and groove <small>One layer 475 mm consists of 2 boards* One layer 1100 mm consists of 1 boards**</small>
m ² Pkt.	1,14* 1,32**
m ² Pal.	55,90* 64,68**
kg Pkt.	11* 12**
kg Pal.	539* 588
<input checked="" type="checkbox"/>	Floating laying
<input checked="" type="checkbox"/>	Glued laying
<input checked="" type="checkbox"/>	Suitable for underfloor heating <small>when gluing the entire area with solvent-free adhesives</small>



Symbol picture - may vary in colour and structure

Woodtype	OAK European
Description	3 layers of the same hardwood. The European Oak has a middle brown to intensive brown colour. The sorting Klassiker is essentially knot-free*, with a simple structure.
Brinell hardness	4,2 kp
Gross density	0,71 g cm ³

2-Strip Plank Flooring OAK "Klassiker"



Surfaces

- Oil | wax oxidative dried
- Varnished 7-times
- Untreated sanded
- Brushed
- Bevel
- Special colour



Symbol picture - may vary in colour and structure

Sorting guidelines	Klassiker
Healthy knots	till ø 5 mm allowed
Black knots	till ø 5 mm allowed
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	not allowed
Curled spots differences in structure	scattered allowed
Natural differences in colour	slightly allowed
Natural fiber orientation	scattered allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	not allowed
Red or brown spots	not allowed
Stains from storage and light blueness	not allowed
Knocked spots	not allowed
Mirror	light mirror alongside allowed

Technical data					
Thickness:	15 mm Useful layer: approx. 5 mm				
Width:	140 mm				
Length:	Fixed length 2400 mm (8 layers pkg.)				
Connection:	Tongue and groove				
<table border="1" style="width: 100%;"> <tr> <td>m² pkg. 2,69</td> <td>m² pal. 112,98</td> </tr> <tr> <td>kg pkg. 26,2</td> <td>kg pal. 1104</td> </tr> </table>		m ² pkg. 2,69	m ² pal. 112,98	kg pkg. 26,2	kg pal. 1104
m ² pkg. 2,69	m ² pal. 112,98				
kg pkg. 26,2	kg pal. 1104				
<input checked="" type="checkbox"/> Floating laying <input checked="" type="checkbox"/> Glued laying <input checked="" type="checkbox"/> Suitable for underfloor heating when gluing the entire area with solvent-free adhesives					



Woodtype **OAK European**

Description 3 layers of the same hardwood. The European Oak has a middle brown to intensive brown colour. The sorting Trend-Epoca is knotty, with a lively structure.

Brinell hardness 4,2 kp
 Gross density 0,71 g | cm³

2-Strip Plank Flooring OAK "Trend-Epoca"



Surfaces


- Oil | wax oxidative dried
- Varnished 7-times
- Untreated sanded
- Brushed
- Bevel
- Special colour



Symbol picture - may vary in colour and structure

Sorting guidelines	Trend-Epoca
Healthy knots	allowed (partly filled)
Black knots	allowed (partly filled)
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	allowed (partly filled)
Curled spots differences in structure	allowed
Natural differences in colour	allowed
Natural fiber orientation	allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	scattered allowed
Red or brown spots	allowed
Stains from storage and light blueness	allowed
Knocked spots	not allowed
Mirror	alongside and crosswise allowed

Technical data					
Thickness:	15 mm Useful layer: approx. 5 mm				
Width:	140 mm				
Length:	Fixed length 2400 mm (8 layers pkg.)				
Connection:	Tongue and groove				
<table border="1" style="width: 100%;"> <tr> <td>m² pkg. 2,69</td> <td>m² pal. 112,98</td> </tr> <tr> <td>kg pkg. 26,2</td> <td>kg pal. 1104</td> </tr> </table>		m² pkg. 2,69	m² pal. 112,98	kg pkg. 26,2	kg pal. 1104
m² pkg. 2,69	m² pal. 112,98				
kg pkg. 26,2	kg pal. 1104				
<input checked="" type="checkbox"/> Floating laying <input checked="" type="checkbox"/> Glued laying <input checked="" type="checkbox"/> Suitable for underfloor heating when gluing the entire area with solvent-free adhesives					

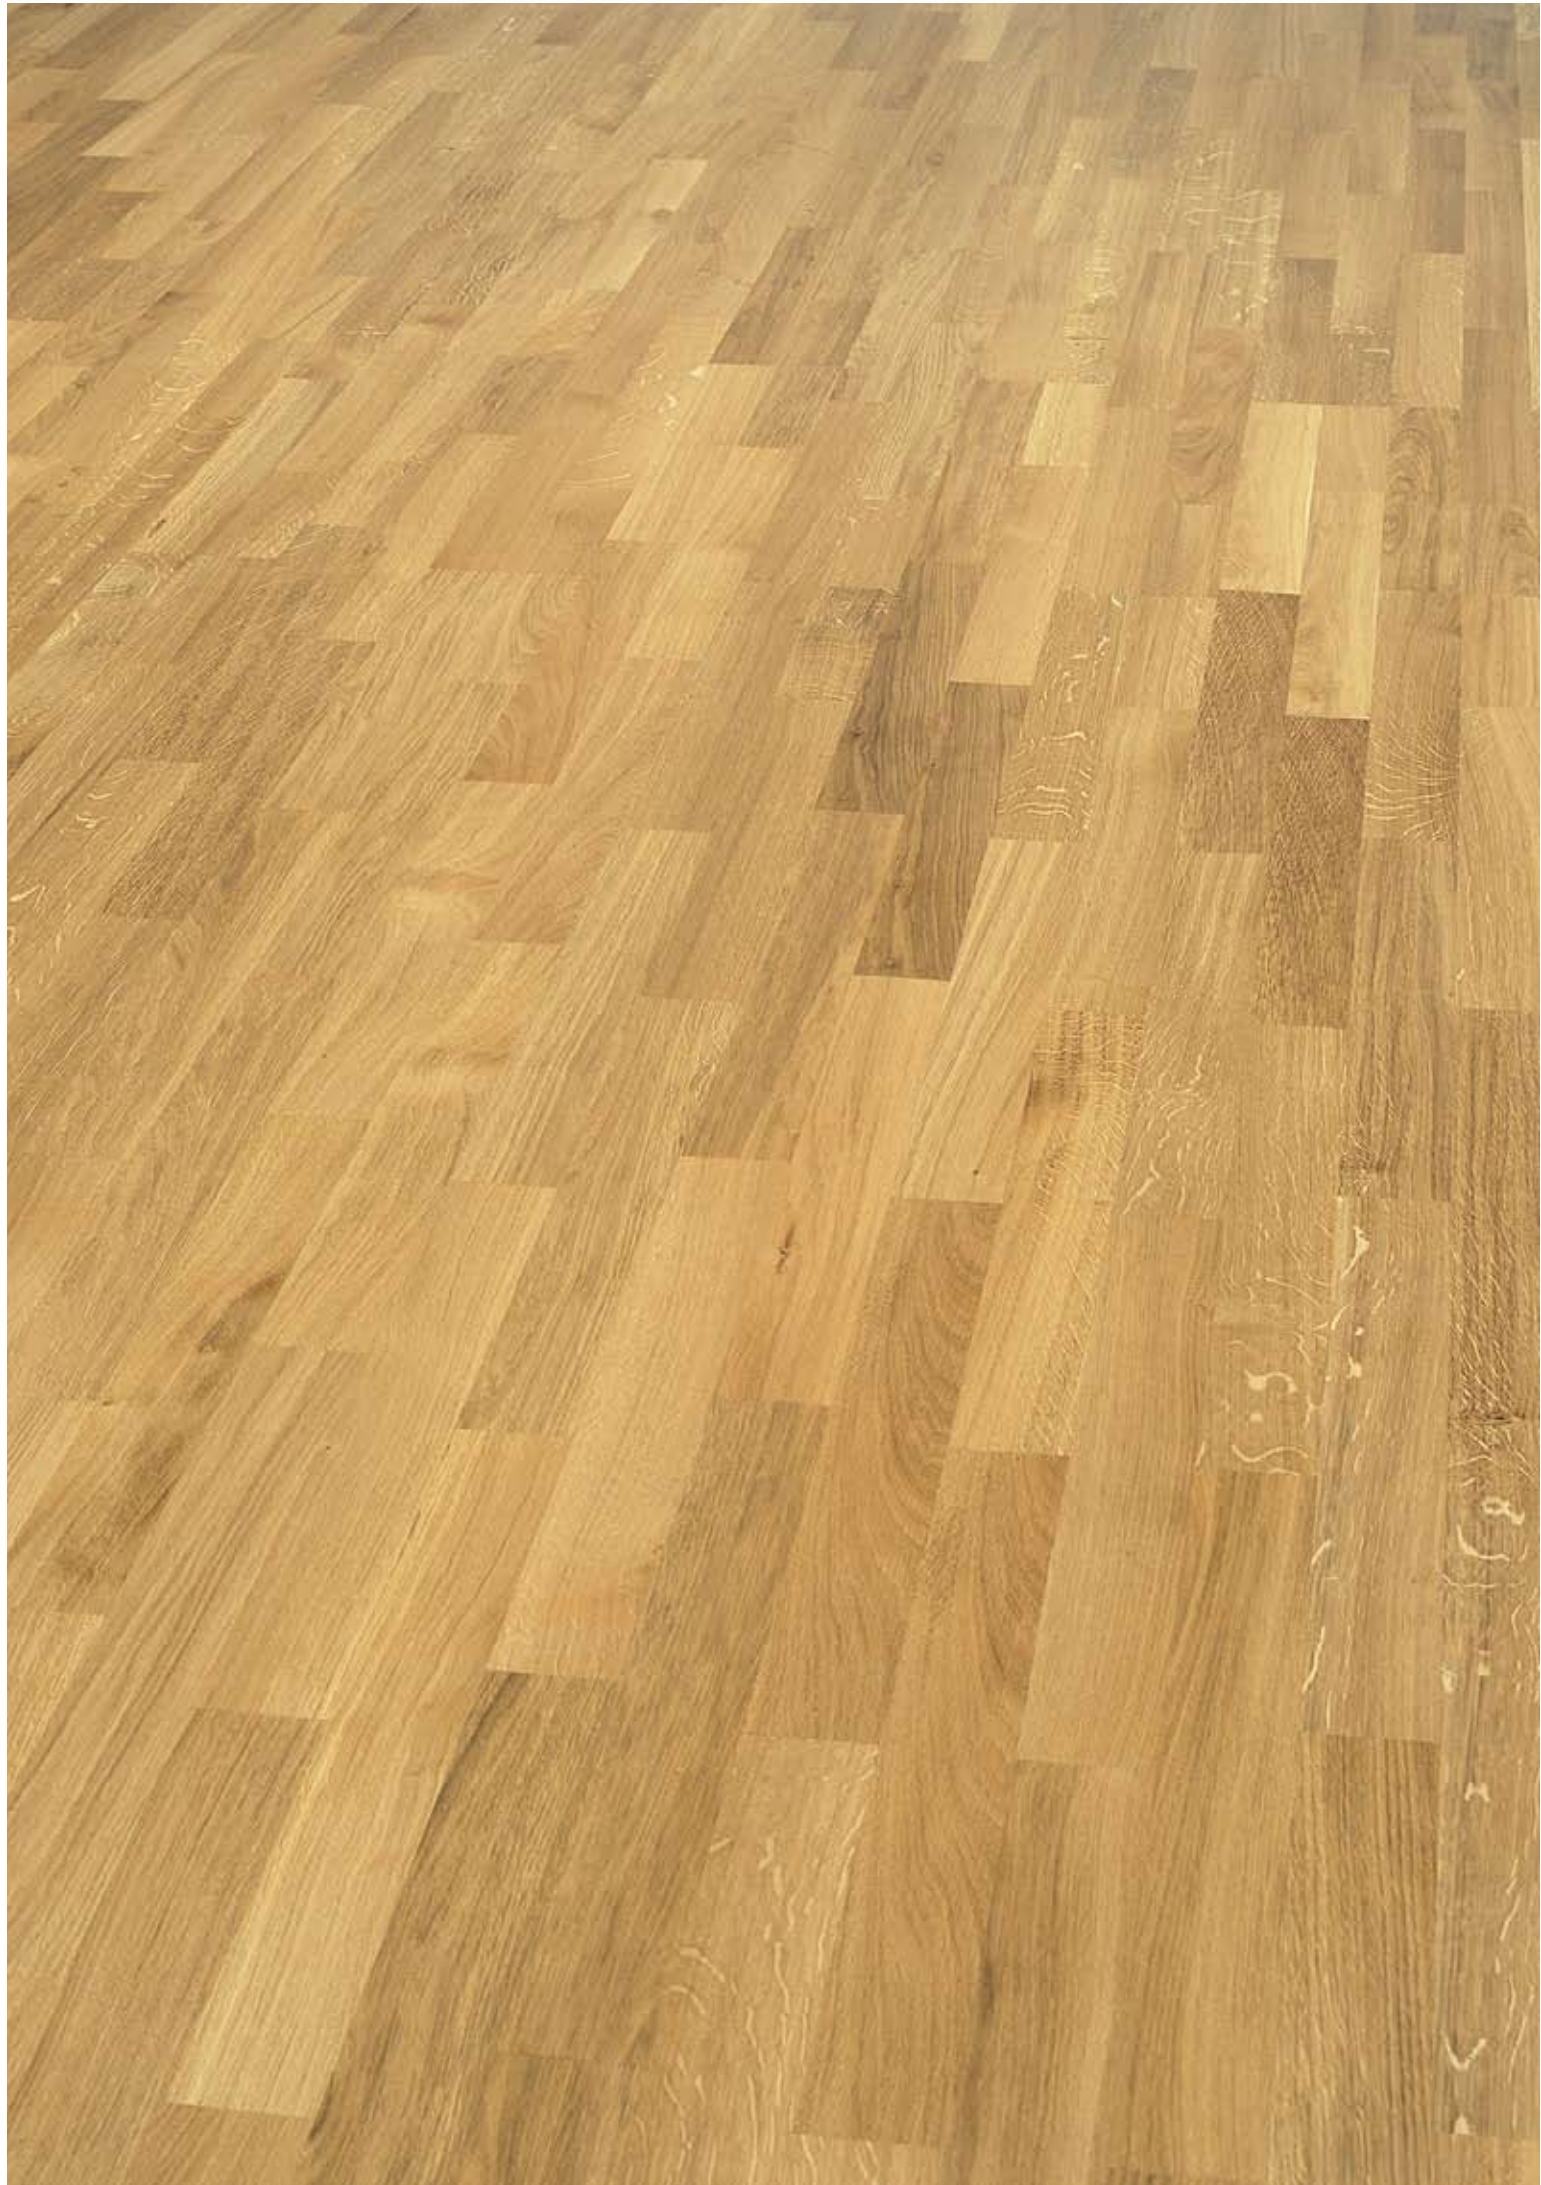

Woodtype	OAK European
Description	3 layers of the same hardwood. The European Oak has a middle brown to intensive brown colour. The sorting Trend-Epoca is knotty, with a lively structure.
Brinell hardness	4,2 kp
Gross density	0,71 g cm ³

2-Strip Plank Flooring OAK Trend-Epoca "Herringbone"



fixed length 475 mm

Surfaces

- Oil | wax oxidative dried
- Varnished 7-times
- Untreated sanded
- Brushed
- Bevel
- Special colour



white



Symbol picture - may vary in colour and structure

Sorting guidelines	Trend-Epoca
Healthy knots	allowed (partly filled)
Black knots	allowed (partly filled)
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	allowed (partly filled)
Curled spots differences in structure	allowed
Natural differences in colour	allowed
Natural fiber orientation	allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	partly filled
Red or brown spots	allowed
Stains from storage and light blueness	allowed
Knocked spots	not allowed
Mirror	alongside and crosswise allowed

Technical data	
Thickness:	15 mm
Width:	140 mm
Length:	Fixed length 475 mm* (8 layers pkg.) 16 pieces
Connection:	Tongue and groove One layer 475 mm consists of 2 boards*
m ² pkg.	1,06
m ² pal.	51,94
kg pkg.	10,3
kg pal.	505
<input checked="" type="checkbox"/> Floating laying	
<input checked="" type="checkbox"/> Glued laying	
<input checked="" type="checkbox"/> Suitable for underfloor heating	
when gluing the entire area with solvent-free adhesives	

