



DIE OBERKLASSE.

Bergland-Parkett
PLANK FLOORING

„Today people know the price of everything but the value of nothing.”

Oskar Wilde



OAK

Down-to-earth warm, mid-brown to intensive brown tint.
Plain to well-structured streaks.



DIE OBERKLASSE.



OAK Trend-Epoca Arkade, brushed, bevel,
Antique oil/wax, slightly/very knotty, lively structure



OAK Trend-Epoca



OAK Trend-Epoca herringbone pattern, brushed, bevelled, slightly/very knotty,
lively structure

OAK



4 OAK Trend-Epoca, slightly/very knotty, lively structure



OAK Klassiker



OAK Klassiker, largely knot-free, sober structure



SMOKED OAK Trend-Epoca, knotty, lively structure

OAK



OAK Trend-Epoca weiß, knotty, lively structure



BLACK WALNUT
steamed

Intensive brown. Dark to light colour contrasts.



DIE OBERKLASSE.



BLACK WALNUT
steamed


BLACK WALNUT steamed Klassiker, largely knot-free, sober structure, with sapwood

ASH

Light yellow to brownly to pronounced dark brown colour.



ASH Trend-Epoca, knotty, lively structure, with brown core

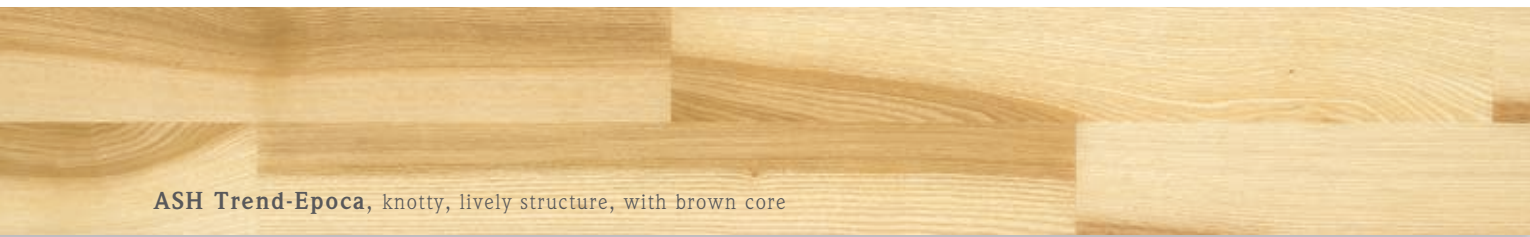

ASH steamed Klassiker „Bernstein“, largely knot-free, lively structure, brushed, oil/wax



ASH Klassiker, largely knot-free, sober structure



ASH Trend-Epoca Technogrey, knotty, brushed with brown core, lively structure, grey-lacquered

ASH



DIE OBERKLASSE.



CHERRY steamed
AND
ELM steamed

CHERRY: Semi-gloss, warm, auburn honey tone.
ELM: Auburn tone, light/dark, lively colouring.



CHERRY steamed

CHERRY steamed Klassiker,
largely knot-free, sober structure

ACACIA
steamed

Red-brownish colouring.



ACACIA steamed

ACACIA steamed Trend-Epoca „Black Star“, knotty, lively structure, black, oil/wax



DIE OBERKLASSE.

ELM steamed

ELM steamed Trend-Epoca,
knotty, lively structure



ACACIA steamed Klassiker, largely knot-free, sober structure

„Style represents the harmony of beauty.“



DIE OBERKLASSE.



BEECH steamed
BEECH natural

Light, slightly red to deep auburn colouring.

Light, brownish colouring.

BEECH steamed
Trend-Epoca
also bevelled



BEECH steamed Trend-Epoca, knotty, lively structure

BEECH steamed Klassiker, largely knot-free, sober structure

BEECH steamed

natural

MAPLE

Very tender, white to
yellow colouring.



MAPLE Trend-Epoca, knotty, lively structure

MAPLE



DIE OBERKLASSE.



PEAR steamed

Warm, auburn colouring.




PEAR steamed Klassiker, largely knot-free, sober structure

ALDER steamed AND BIRCH

ALDER: soft, light-brown to reddish colour with occasional brown shots.


BIRCH: light, wheat-yellow colouring.

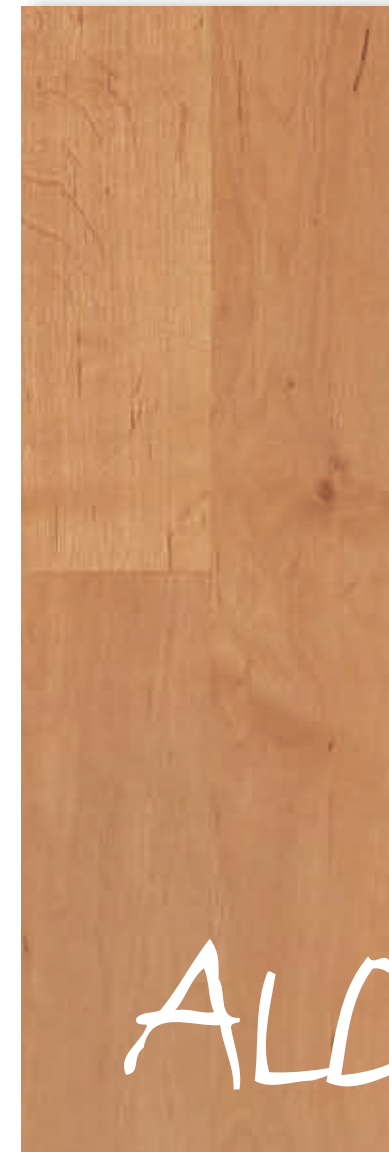

ALDER steamed



ALDER steamed Klassiker, largely knot-free, sober structure

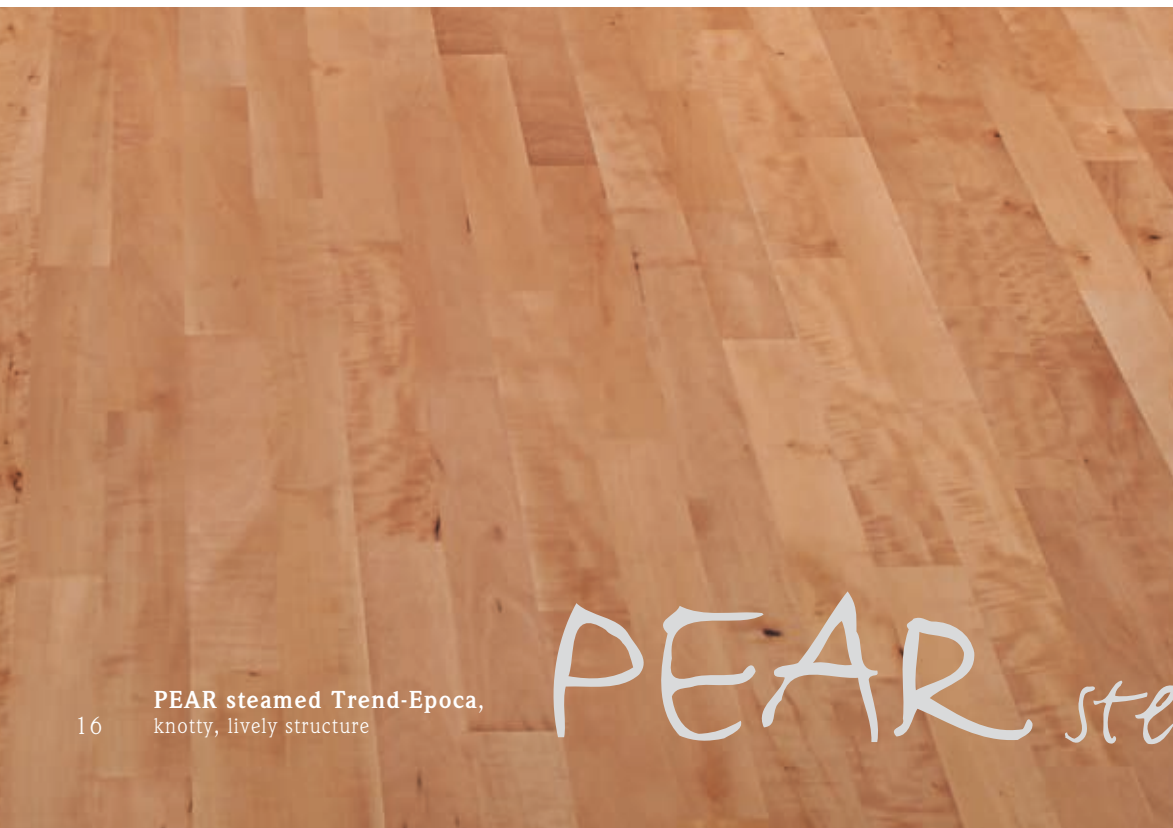

PEAR steamed

PEAR steamed Trend-Epoca, knotty, lively structure



BIRCH



BIRCH Klassiker, largely knot-free, sober structure

ECOLOGICAL

Our company's first priority and philosophy is the commitment to a particularly high ecological standard of our products. That is why we only purchase raw materials from sustainably managed domestic forests.

Produced while undergoing regular quality controls in a strictly ecological manner, our parquet flooring is a natural, first-grade product based on the incomparably robust 3-layer construction made of one and the same hardwood.

The basis of our products is exclusively high-grade hardwood timber. During the production process we only use ecological materials free from toxic substances and solvents.

The high quality of our products is also underlined by the rating „ecologically particularly valuable“ of the Fraunhofer Wilhelm-Klauditz-Institut, the leading institute for international research in Germany.

ÖKO-TEST, the well-known German eco-test consumer magazine, recently awarded Bergland-Parkett the highest possible grade of „very good“.

PRE-FINISHED PARQUET FLOORING from European manufacturers of high repute has been tested as to its pollutant emissions and mechanical durability.

An average room temperature of 20 - 22° C and an air humidity of 50 - 60% provide for an optimum and healthy indoor climate for people and wood alike.

All these factors combine to guarantee a naturally ecological lifestyle and pure joy for many years to come.



WOOD & WATER

- the synergetic effects of natural elementary forces

For its production of high-quality parquet floors, Bergland-Parkett relies with success on the use of the worldwide acknowledged Grander Technology.

Bergland-Parkett exploits this revitalisation effect in the processing of the natural material of wood, where natural elementary forces bouncing off each other, form an animated synthesis of the feeling of well-being and quality of life.

A unique result affecting both your residential zone and area of living.

Bergland-Parkett - the natural beauty of wood combined with the revitalisation effect of Grander-Water - to produce topquality parquet floors that are both exquisite and fascinating at the same time.



3-LAYER PLANK FLOORING 2-STRIP



- ✓ Suited for floor heating! * except for „BEECH natural“
- ✓ 5mm floor layer 3-layer construction
- ✓ Floor board thickness 15mm
- ✓ Floor board width 14 cm



DIE OBERKLASSE.

	Construction height mm	Collection	Knot-free*	Knotty	Slightly/very knotty	Structure	① Fixed length 240 cm ② herringbone pattern 14 x 47,5 li/re	Catalogue page	Any surfaces lacquered or oil/wax				
									Brushing	Bevel	white	Antique	black
OAK	15 mm	Trend-Epoca			✓	lively	①	4	yes/no	yes/no	✓	✓	✓
	15 mm	Arkade			✓	lively	①	4	yes/no	yes/no		✓	
	15 mm	Klassiker	✓			sober	②	5	yes/no	yes/no	✓	✓	✓
SMOKED OAK	15 mm	Trend-Epoca		✓		lively	①	6	yes/no	yes/no			
BEECH steamed	15 mm	Trend-Epoca			✓	lively	②	14	no	yes/no	✓	✓	✓
	15 mm	Klassiker	✓			sober	①	14	no	yes/no	✓	✓	✓
BEECH natural	15 mm	Klassiker	✓			sober	①	14	no	yes/no	✓	✓	✓
ACACIA	15 mm	Trend-Epoca Black Star		✓		lively	①	11	yes/no	yes/no	✓		✓
	15 mm	Klassiker	✓			sober	①	11	yes/no	yes/no	✓	✓	✓
ASH	15 mm	Trend-Epoca		✓		lively	①	8	yes/no	yes/no	✓	✓	✓
	15 mm	Bernstein	✓			sober	①	8	yes	yes/no	✓	✓	✓

*2)

	Construction height mm	Collection	Knot-free*	Knotty	Slightly/very knotty	Structure	① Fixed length 240 cm ② herringbone pattern 14 x 47,5 li/re	Catalogue page	Any surfaces lacquered or oil/wax				Special surface
									Brushing	Bevel	white	Antique	
ASH	15 mm	Klassiker	✓			sober	①	8	yes/no	yes/no	✓	✓	✓
	15 mm	Trend-Epoca		✓		lively	①	9	yes	no			technology lacquered
MAPLE	15 mm	Trend-Epoca		✓		lively	①	15	no	yes/no	✓	✓	✓
	15 mm	Klassiker	✓			sober	①	15	no	yes/no	✓	✓	✓
PEAR	15 mm	Klassiker	✓			sober	①	16	no	yes/no	✓	✓	✓
	15 mm	Trend-Epoca		✓		lively	①	16	no	yes/no	✓	✓	✓
ALDER	15 mm	Klassiker	✓			sober	①	17	no	yes/no	✓	✓	✓
BIRCH	15 mm	Klassiker	✓			sober	①	17	no	yes/no	✓	✓	✓
BLACK WALNUT	15 mm	Klassiker	✓			sober	①	7	no	yes/no	✓	✓	✓
CHERRY steamed	15 mm	Klassiker	✓			sober	①	10	no	yes/no	✓	✓	✓
ELM steamed	15 mm	Trend-Epoca		✓		lively	①	10	yes/no	yes/no	✓	✓	✓

*1) Largely knot-free (slight knots up to a maximum 5 mm diameter)
*2) Not suited for floor heating

SURFACES

Oil/wax - resilience seal - untreated


Perfect surface sealing to protect your parquet floor and improve its durability.

The Bergland-Parkett surface treatment is the best protection for your parquet flooring. Depending on the field of application, Bergland-Parkett offers a broad range of surface treatments that shape the appearance of the wood and provide for healthy living.

Oil/Wax - Feel the naturalness

This surface treatment especially highlights the streak of the wooden floor and gives the intensity of colours a very special atmosphere.

In order to preserve this appearance, our recommendation is for you to use the Bergland-Parkett care products.

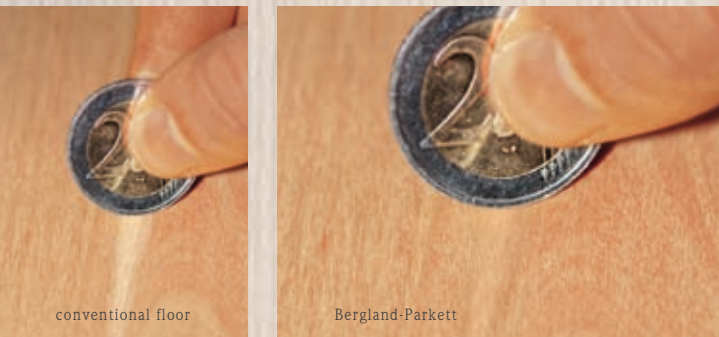

Resilience seal

The remarkable elasticity of our six-fold quality sealing ensures that extreme high abrasion and scratch resistance.

In keeping with the quality class „Much used floors“, our six-fold sealing offers the best possible multiple protection.

As a result of a special application procedure, the lacquer penetrates deeply into the wood forming a constantly elastic and highly resistant surface.

This considerably prolongs the durability of your parquet flooring.



DIE OBERKLASSE.

SOLID & PRE-FINISHED

Due to the exceptional construction of Bergland-Parkett, which has been the recipient of awards, it has been possible to reduce swelling and shrinkage coefficients by up to 70% as against solid wood. The solid construction and the fact of the parquet being well-set into the substrate contribute to a substantial improvement of the acoustic insulation.

USE AND INSTALLATION

Bergland-Parkett besteht aus 3 Schichten gleichen Laubholzes mit einer Gesamtdicke von 15 mm. Der Vorteil diese 3-schichtigen Aufbaus liegt darin, dass das Parkett besonders trittfest und formstabil ist und sich bestens für schwimmende als auch verklebte Verlegung eignet.

FLOOR HEATING

With the exception of one wood species (natural beech), all Bergland-Parkett floorings are suited for installation on radiant floor heating given that the specific laying instructions of the manufacturer are observed. The special 3-layer construction considerably improves the thermal conductivity of floor heating systems.



UNIQUE DESIGN & AWARD- ACCLAIMED ENGINEERING

- Three layers from one and the same hardwood
- 5 mm floor layer to withstand the maximum stresses imposed
- Hardwood centre layer for excellent stability
- 70% reduction in the swelling and shrinkage dimensions
- Exceptional design backed with innovative engineering
- Unites the benefits of solid and pre-finished parquet floorings
- Controlled quality
- Improved acoustic properties thanks to the special construction
- Maximum degree of safety coming from categories „Cfl - s1“ fire retardant and emitting little smoke
- Use of raw materials only from sustainably managed forests

MAXIMUM SAFETY

Bergland-Parkett flooring complies with the classifications of „Cfl - s1“ emitting little smoke and fire retardant in keeping with the statutory regulations and provisions. It thus meets the regulations applying to property construction and attic extensions.

FRONT-EDGE GLUING

Thanks to the special manufacturing processes developed by Bergland-Parkett, it is now possible to glue the „front edges“ of the 2-ply brick pattern elements in addition to the well-known „side-edge gluing“. As a consequence, protection against moisture is considerably improved and long lasting stability ensured.



LEGAL NOTICE
 Publisher: Holzindustrie Amshauer - Karl Amshauer Ges.m.b.H.
 3252 Petzenkirchen/Kendl, Austria - www.bergland-parkett.at
 Concept/Graphics/Typography: TeamCraft Werbeagentur KG - www.teamcraft.at
 Photo credits: TeamCraft KG, Imagefoto, Fa. Sommerhuber, aboutpixel.de/
 Beneke Traub, Beta-Hotel, Charly Moden
 The following rights are reserved – collection modifications undertaken by the manufacturer, variations in colour due to printing as well as printing errors.



LUXURY CLASS.

Our company has been working with the valuable raw material wood for more than 100 years.

As a result of our intensive involvement and continuous learning processes during this time, we have developed highly innovative manufacturing techniques that distinguish the company today through its outstanding quality, which is renowned far beyond our borders.

Thus Bergland-Parkett was the first manufacturer to succeed in producing a 3-layer solid parquet flooring from one and the same deciduous wood, and in this way to combine all the advantages of solid and pre-finished parquet in one product – solid wood and pre-finished parquet at the same time.

Our ongoing investment in the best, highly motivated staff and our modern production techniques are the guarantee of our philosophy of aiming for the highest quality.

In this way Bergland-Parkett creates parquet floors that hold their value timelessly and can be used for decades.

Thomas Amashauffer
Managing Director

Sarl PARIS ESPACE ECO
30 rue de St Petersburg
75008 PARIS
Téléphone : 01 53 43 83 84
Mail: parisespace-eco@wanadoo.fr
www.parisespace-eco.com

Quality has its price.

Bergland-Parkett – Your decision for lasting value.
This is why our select floors are available only from
authorised specialist dealers.

